

Excellence

HETEROGENEOUS VINYL

A full spectrum
of inspiration

A modern interior scene featuring a white sofa, a black side table, a lamp, and a patterned rug. The room is minimalist with a grey wall and a dark floor. A white sofa is positioned against the wall, with a black lamp on top. A black side table holds a stack of books. A patterned rug with a repeating geometric design is on the floor. The overall aesthetic is clean and contemporary.

 **Tarkett**

CONTENTS

- CREATE DISTINCT SPACES FROM FLOORS TO WALL 3
-
- COMPLETE DEDICATION TO WELL-BEING 5
-
- TOTAL DESIGN FREEDOM 7
-
- A CONCENTRATION OF TECHNOLOGY 8
-
- ENGINEERED FOR DURABLE RESISTANCE 9
-
- A FULL SOLUTION FOR ALL SPACES 11
-
- LOOSE-LAY SOLUTION FOR RENOVATION: GENIUS 13
-
- WHATEVER YOUR NEED, WE HAVE IT COVERED 15
-
- DESIGNING AN ENVIRONMENT FOR AGEING WELL 16
-
- INSTALLING FLOORING TO ENSURE LONG LIFE 20
-
- A METHODOICAL APPROACH TO CLEANING 21
-
- FULL SOLUTION OPTIONS 22
-
- EXCELLENCE TENDER SPECIFICATIONS 26



EXCELLENCE
 ORIGAMI NUMBERS - DARK GREY 181
 UNI - BLACK 939

CREATE DISTINCT SPACES FROM FLOORS TO WALL




Multiply your creative possibilities when designing spaces that generate energy and well-being while ensuring resistance and durability. Tarkett's premium range of heterogeneous vinyl floor, wall and stair covering collections offers a complete solution.

combine with the Stairs and ProtectWALL collections to create bespoke ambiances from floor to wall in segments such as education, healthcare, aged care, stores and shops, hospitality or offices.

The heterogeneous collection of floors offers the largest colour and design range on the market. Mix and match among the attractive and innovative hues and patterns and

And thanks to the Excellence collection's proven technical performance, floors are long-lasting and deliver environmentally sound quality and design.

DESIGN



250+
 flooring options



MATTE
 finish



Full Floor,
 Wall & Stairs
 coordination



GENIUS
 LOOSE-LAY
GLUE-FREE
 installation

PERFORMANCE



Excellent indentation to acoustic ratio

Tapiflex Excellence (Acoustic)
 0.08mm / 19dB*

Acczent Excellence (Compact)
 0.01mm / 3dB*

New Compact Acoustic Option (Acczent Platinum I)**
 0.03mm / 9dB*



Traffic resistance
 0.80mm wearlayer
 on all sheet products

*Resistance to indentation / sound impact reduction – Best measured value
 **Please refer to page 15 of the brochure for conditions



EXCELLENCE
 CUBIC - BRIGHT ICE BLUE 135
 UNI - DARK GREY 916

COMPLETE DEDICATION TO WELL-BEING

A pillar of Tarkett's sustainability strategy has always been designing and making products that contribute to the health and well-being of occupants.

In 2014, the company therefore decided to take the radical step of eliminating phthalates from its vinyl flooring production in Europe. We replaced it with phthalate-free plasticizers that are approved for food containers and toys for young children.

Today, with the launch of our 100% phthalate-free Excellence collection, we are proactively meeting consumer concerns. For creating healthy spaces where people live, work, play and learn, Tarkett is your partner.



Completely Better Air Quality

People spend 90% of their time indoors, so good air quality is crucial. There are no phthalates in the Excellence collection and very low levels of volatile organic compounds (VOCs).

VOCs **10** µg/m³
 over 100 times lower than
 the EU standard EN-ISO 16000


Completely Comfortable Walking

Tarkett turns its expertise in shock absorption, usually found in sports flooring, to building occupants. Children experience greater comfort while playing on the floor, and any unfortunate falls by the elderly are cushioned.



Complete Attention to In-Room Noise

Tarkett acoustic flooring dampens noise, creating a quieter environment that is conducive to both learning and healing.

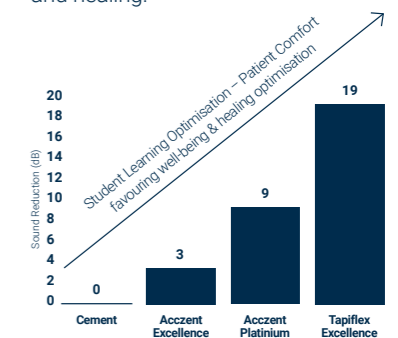




EXCELLENCE
 FACET - WATER 115
 UNI - INTENSE WATER 936
 OAK TREE - GREY 202
 ALLOVER WOOD - WHITE 714

TOTAL DESIGN FREEDOM

Tarkett's Excellence collection provides a multitude of choices that meet current design trends and complement your requirements.



Total Inspiration

The largest selection of colours and designs on the market. Play with novel ideas.




Total Wood Realism

Unique multicolour welding rods for all wood decor give the most realistic and seamless look when installed.

250+
flooring options

80%
new patterns

Uni-coloured welding rod




Total Harmonisation

Tarkett's Excellence range has been designed to harmonise with four new ranges:

ProtectWALL, Tapiflex Stairs, Accent & Tapiflex Platinum, and accessory collections

Multi-coloured welding rod



Total Matte Effect


A high matte finish softens light reflected off flooring for additional occupant comfort and a more realistic look.

100% matte finish

Space through Light and Harmony

Energising and stimulating, light plays a major role in any space. Three types of light, beneficial, natural and smart, inspired our Excellence collection. In any space, generate wellness and warmth, revitalise and infuse energy, and encourage interaction and connection. Play with a myriad of colours, patterns and textures to create unique spaces and enhance well-being.

A CONCENTRATION OF TECHNOLOGY

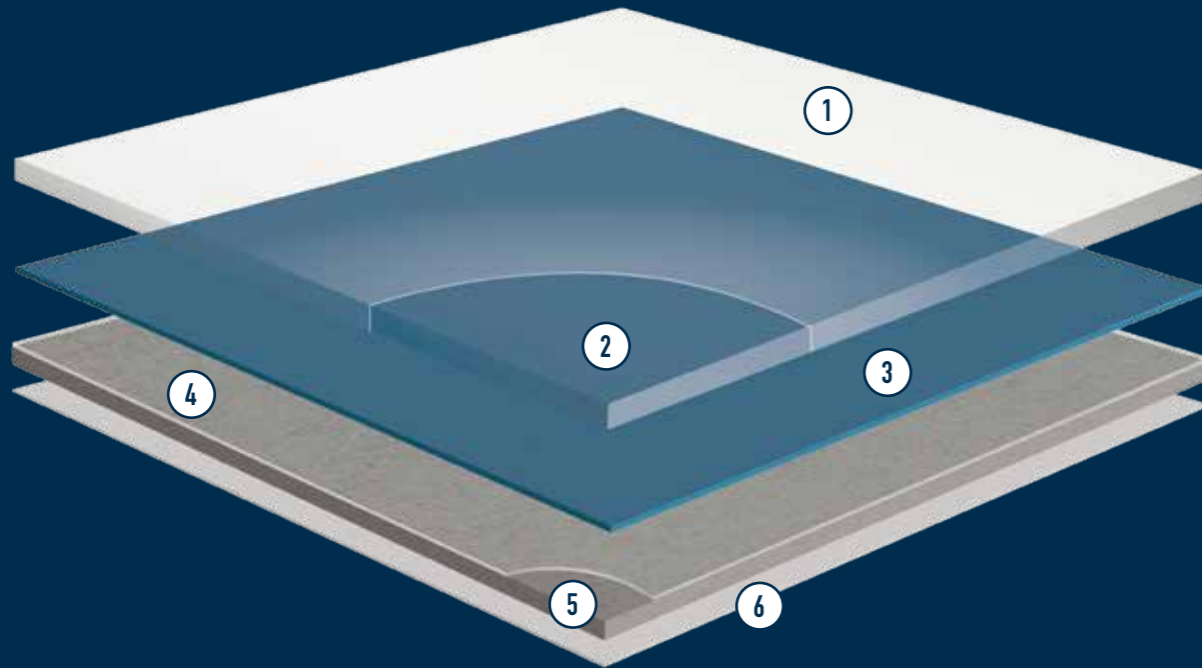

1
PUR treatment, a photo-reticulated coating, is highly resistant to abrasion and scratches

3
High quality printed designs for a vast selection of colours and patterns

5
Solid homogeneous calendered sheet made of recycled vinyl for resistance to indentation and tearing

2
Pure PVC transparent wear layer – 0.80 mm on Excellence U4 – for the best resistance to traffic and wear

4
High density glass fibre non-woven reinforcement for high dimensional stability and resistance to furniture

6
The Tapiflex version has high-density closed-cell foam backing for sound reduction, higher rollability and underfoot comfort

ENGINEERED FOR DURABLE RESISTANCE

Our Excellence collection is built to withstand daily wear in all areas while also lowering the overall life-cycle cost and maintaining the floor's freshly installed appearance for longer.




NEW!
0.80 mm
on both **acoustic** (Tapiflex) & **compact** (Acczent) options
In order to adapt to building-specific requirements.

Less force is required and it is easier to push trolleys and medical beds*.

*internal testing

29%
(vs. former range)
improved rollability on compact & acoustic profiles

NEW!
0.03 mm / 9 dB
Compact acoustic option (Acczent Platinumium)
For high traffic areas requiring medium acoustic performance, ask about our compact 1mm wear layer compact acoustic flooring.

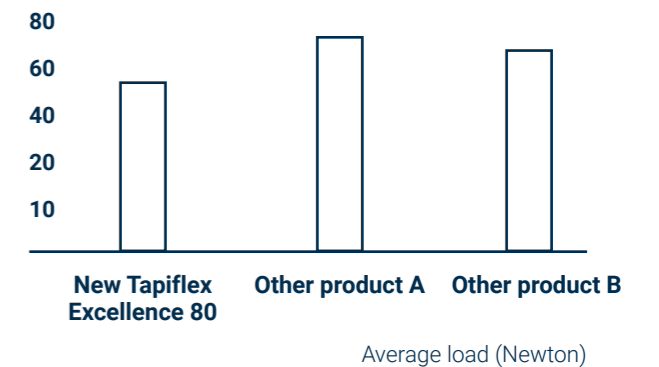

Each layer is coated onto the previous one, creating a fused product highly resistant to the wear and tear of daily life. The flooring is impervious to indentation and tearing.

Resisting stains in numerous environments, floors can be cleaned using a little water and neutral detergents to maintain cleanliness between mechanical buffings.

Tapiflex **0.08 mm** **Acczent** **0.01 mm**
Resistance to indentation (best measured value)

Up to 25% reduction in the cost of maintenance and cleaning*
*Refer to Tarkett Life Cycle Cost (LCC) software



PROTECTWALL
TISSE - GREY BEIGE 057

EXCELLENCE
OAK LONGSTRIPE - NATURAL 002
UNI - INTENSE WATER 936
UNI - INTENSE PETROL 935

A FULL SOLUTION FOR ALL SPACES

The Excellence collection has been designed to harmonise with ProtectWALL, Acczent & Tapiflex Platinum, Tapiflex Stairs and accessory ranges. We have taken this a step further; patterns that are identical across the range have been developed to help your architectural project benefit from a coordinated design across all areas. Install the full solution!

Wetroom Concept

For a watertight design solution
(Floor: 89 colour options
Wall: 77 colour options)

ProtectWALL

For maximum impact,
stain & scratch resistance
(23 colour options)

Tapiflex Stairs

For increased safety
(22 colour options)

NEW Platinum


For the ideal heavy
traffic solution
(72 colour options)

Accessibility Tactile warning strips

To ensure safety and guidance


NEW Excellence

For maximum design possibilities
(132 colour options)

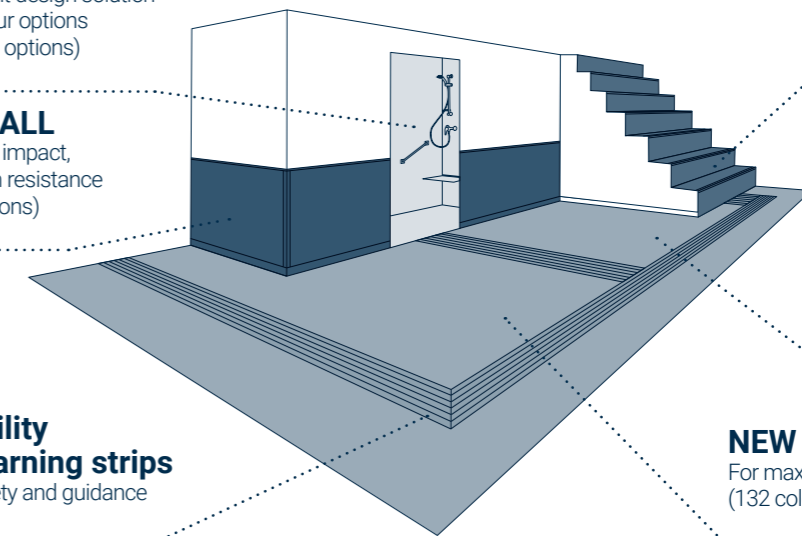


Accessories for a perfect finish

Optimise building orientation, navigation and safety with our dedicated range of accessories.



WELDING RODS

Secure the junction between two rolls of flooring or wall and floor coverings. Unique multicolour welding rods for wood patterns.



PRE-FORMED SKIRTING

Pre-formed set-in skirting made of PVC flooring, reinforced with polymer on backside. Welded to the floor covering and glued to the wall.
60/80/100 x 100/200 x 2400mm.
Available on request in all colours



SET-ON SKIRTING

KS 61: PVC semi-rigid skirting for decorative use.
Article code: 1411 + colour code
(please refer to reference list, page 23)



TRANSITION PROFILE

Used to join different floorings of the same or slightly different heights.
Order code:
Dark grey: 1452 000 / Light grey: 1452 001 /
White: 1452 002


ALSO AVAILABLE

- Accessibility items: tactile guide strips, tiles, studs
- Expansion joints
- Tarkoprotect


Please also ask for more information from your Tarkett rep.



EXCELLENCE GENIUS
 UNI - BRIGHT ICE BLUE
 LONG MODERN OAK - NATURAL
 LONG MODERN OAK - WHITE

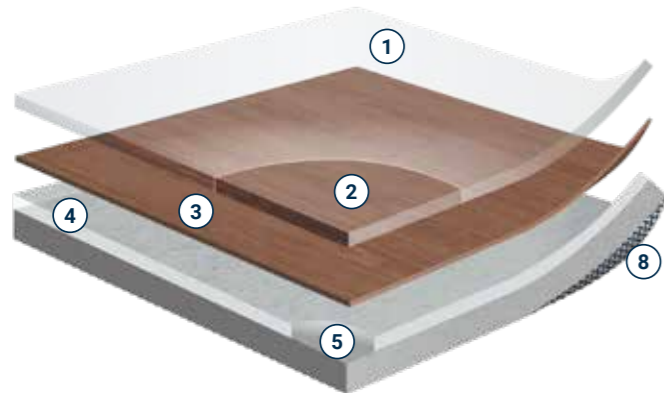

Tapiflex acoustic
 Impact sound reduction 19dB



Accent compact
 Very high-intensity traffic and damp subfloors

- ① Top Clean XP PUR treatment, a photo-reticulated coating, is highly resistant to abrasions and scratches
- ② Pure PVC transparent wear layer - 0.70 mm on all profiles - for the best resistance to traffic and wear
- ③ High quality printed designs for a vast selection of colours and patterns
- ④ Improved high-density glass fibre non-woven reinforcement for exceptional dimensional stability and resistance to furniture
- ⑤ Reinforced solid homogeneous calenderer sheet made of recycled vinyl for flatness, resistance to indentation and tearing
- ⑥ Integrated damp protection layer, preventing moisture from rising through the flooring from the sub-floor
- ⑦ Anti-skid ventilated backing ensures air circulation and ventilation underneath the floor covering, plus better grip and product stability over time
- ⑧ Anti-skid closed-cell foam backing for sound reduction, easy rolling and installation, underfoot comfort and durability over time

GLUE-FREE SOLUTION: GENIUS

LOOSE-LAY, QUICK TO INSTALL, EASY TO RECYCLE


Step into the future with Tarkett's new Genius loose-lay that prioritises sustainability and efficiency.

Backed by rigorous quality tests, our glue-free Excellence Genius technology is the smart choice whether you are choosing flooring for a new building, looking to make overnight renovations possible or need to install and easily remove flooring on a variety of subfloors. **The same performance & durability as glue down!**

ECO-DESIGNED LOOSE-LAY




100% Recyclable
 post installation off-cuts and post consumer via ReStart® program



Glue-free installation

- Eco-designed with high quality materials: >20% of recycled materials, ≤ 10µg/m³ VOC
- Decrease pollution risks linked to product removal in occupied areas: dust creating hygiene risks in hospitals, noise linked to work in progress, VOC emissions & odours from glue
- Easy access to the subfloor


EXTENSIVE CHOICES



25 ready to order designs
 + Any design from the Excellence collection on demand




Available in **compact** and **acoustic** 19 db versions



Compatible with multiple subfloors (standard cement, standard wood, asbestos*, damp subfloors**, existing compact vinyl and linoleum)
 For installation on these subfloors, our **10-year warranty will be maintained**

QUICKER INSTALLATION, LESS INCONVENIENCE



• **Save installation time** (vs. glue-down): up to 56% on 1st installation and up to 92% on renovation
 • Immediate setting into traffic



Resistant to high traffic and rolling loads

- Resists to 115kg Furniture Leg & 100,000 cycles Castor chair
- Resists to 300kg medical beds and 600kg X-Ray systems
- Best in class dimensional stability 0,04%



Compatible with damp subfloors (compact version)
 Up to 7% CCM / 92% HR

Individualised designs with Floorcraft service

For your projects requiring individually customised designs with logos, brand colours or other visual elements, Tarkett Floorcraft offers unique bespoke designs created by our **FLOORCRAFT design service using sonic cut**. Designs can be tailored to the aesthetic and commercial requirements and shape of any floor area. Floorcraft designs are assembled in the factory and delivered to the site. Detailed layout plans make it fast and simple to install.

For more information: professionals.tarkett.com/content/floorcraft-design-service



WHATEVER YOUR NEED, WE HAVE IT COVERED

From your specific needs based on building constraints, optimal budget management and design customisation to jobsite waste management, Tarkett accompanies you throughout your design and building process.

Product options

In addition to our standard, permanently available collection, we offer further options to meet specific requirements. All products can be produced with a selection of colours in the full Excellence range as a special arrangement. See conditions below.

PRODUCTS	MINIMUM ORDER QUANTITY	LEADTIME
Acczent Platinum (Compact acoustic 9 dB – 1 mm Wear Layer)	600 m ²	5 weeks
Acczent & Tapiflex Excellence Genius loose-lay	800 m ²	5 weeks
Tapiflex Tiles	1,100 m ²	5 weeks

Post-Installation Clean-up

Get flooring offcuts collected and recycled with Tarkett's comprehensive ReStart programme.

- Job site waste is reduced.
- Job site waste management is optimised.
- Guaranteed traceability of collected off-cuts.
- Sustainable development is integrated, anticipating European regulation requirements.



Reducing the Cost of Flooring during its Full Lifespan

Your project's global budget dedicated to flooring includes not only purchase and installation but must also cover cleaning and maintenance operations performed on the floor during its lifespan.

Tarkett's highly resistant surface treatment, TopClean XP – no polish and no wax for life – facilitates and shortens cleaning operations and lowers consumption of chemicals, water and electricity, generating significant savings and limiting environmental impact at the same time.

Your Tarkett contact is at your disposal to help you the complete a Life Cycle Cost estimate for your facility or project.

LCC Calculation

Purchase & installation	Cleaning & maintenance
8% of total flooring cost*	92% of total flooring cost*

*average

DESIGNING AN ENVIRONMENT FOR AGEING WELL

We are living longer thanks to advances in the healthcare segment. But with ageing come declining faculties and specific challenges. Dementia may cause further complications.

People with dementia typically experience memory problems, have difficulty processing information and are less able to communicate. The condition also impacts their perception of their surroundings, leaving them unable to relate what they see to physical reality or to perceive objects in three dimensions. These difficulties can generate stress and anxiety. It is therefore important to design aged care facilities with dementia in mind.

“A good floor space for older people, and particularly those with dementia, allows and encourages activities, involvement, loyalty, comfort and ultimately identity in a positive way. People with dementia need to feel that every detail is designed to generate well-being. The floor is key to the environment.”

Prof. Dipl.-Ing. Rudolf Schrickler, President BDIA



EXCELLENCE GENIUS
UNI INTENSE - TERRACOTTA
SERENE OAK - RED BROWN



USE THE RIGHT PATTERN TO CREATE A HOME LIKE FEELING

Comfort is the key word when welcoming a person into their new home. Familiar designs with subtle patterns or textures will contribute to avoiding an institutional feeling. Particular attention should be paid to the choice of designs. Avoid busy patterns which may be misinterpreted and can cause anxiety for people living with dementia.



USE Plain patterns, material effects with subtle pattern



Tissage-Soft Grey
25128 127



Twine-Indigo
25128 140



Serene Oak-Warm Brown
25204 511



Fiber Wood-Natural
25128 303



CHOOSE Calm and subtle patterns Tarkett specially developed wood patterns, without knots, in line with dementia guidelines.



Serene Oak-Medium Grey
25204 508



Serene Oak-Brown Grey
25204 509



Serene Oak-Red Brown
25204 510



Serene Oak-Warm Brown
25204 511



Serene Oak-Dark Brown
25204 512




AVOID busy patterns, dark colours and high-contrast designs



Terrazzo-Terracotta
25128 104



Bubbles-Cold Mix
25130 143



Facet-Black & White
25128 118



Cubic-Bright Anis
25130 164




PROVIDE OPTIMUM CONTRAST TO FACILITATE VISUAL PERCEPTION

As the eye's lens gradually yellows with age, our colour perception is affected. We are less able to perceive contrast, colours become less vivid and more monochrome (red can start to look like pink) and we have trouble distinguishing shades of blue or green. Colour contrast is therefore key to providing visual clues for doors, handles, controls and furniture, thereby enabling people with poor sight to better make sense of their surroundings.


Use Light Reflection Value (LRV) to create contrast

The light reflectance value is the total quantity of light reflected by a surface when illuminated by a light source. The LRV scale runs from 0, which is the darkest or least reflective, to 100, which is the lightest or most reflective. Taking LRV into account can help understand how much contrast is visible.

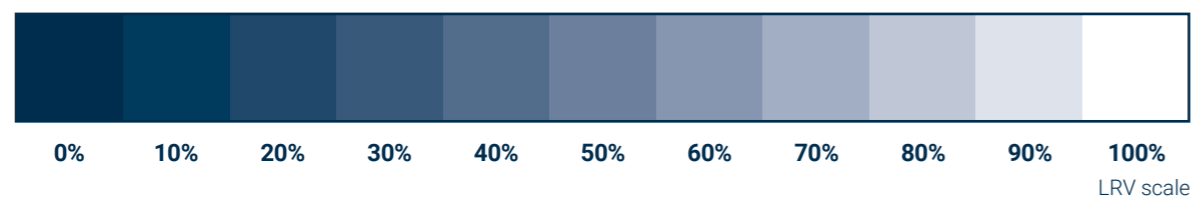

Use **strong contrast** between **floors and wall** and between **furniture and floors** to enhance visual perception:
LRV difference > 30 points.

Use **low contrast** for a smooth transition **from bedroom to the wetroom and from bedroom to the corridor**.
LRV difference < 10 points.

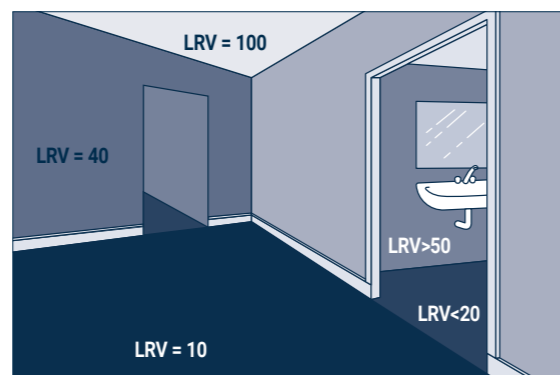

EXAMPLES OF COLOUR SCHEMES FOR A RANGE OF SPACES:

We recommend darker floors (with an LRV between 10 and 40) to provide the reassuring appearance of a plain, solid surface safe to walk on. The walls should be in contrasting colours with an LRV differential of >30 points. Find out more design choices on elderly-care.tarkett.com



Aquarelle HFS Stone light warm grey LRV = 74	ProtectWall Tissé Fresh green LRV=61	ProtectWall Tissé Light aqua LRV=53
---	---	--




WETROOM	BEDROOM	CORRIDOR
----------------	----------------	-----------------



MS Aqua Concrete warm grey LRV=19	Excellence Brushed Oak medium LRV=28	Excellence Serene Oak red brown LRV14
--	---	--



Aquarelle HFS Uni Yellow LRV=67	ProtectWall Uni Light beige LRV=65	ProtectWall Tisse Warm grey LRV=76
--	---	---

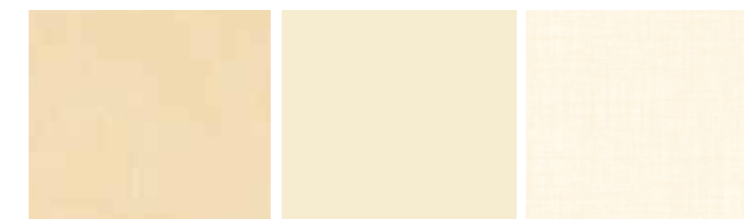

WETROOM	BEDROOM	CORRIDOR
----------------	----------------	-----------------



MS Aqua Concrete warm grey LRV=19	Excellence Fiber Wood natural LRV=28	Excellence Uni Intense terracotta LRV=23
--	---	---



CHECK OUR DEMENTIA FRIENDLY DESIGNS

Dementia friendly designs are qualified by their pattern and their light reflection value. As far as the pattern is concerned, our designs have been checked by the University of Stirling's Dementia Services Development Centre (DSDC) and rated 1a and 1b:

- 1a: Finishes within this rating are plain and can be used indiscriminately
- 1b: Finishes within this rating are semi-plain (minimal texture or fleck and / or minimum contrast between fleck / pattern, wood effect with no knots) and in general, can be used throughout.

As far as LRV is concerned, our flooring designs present values between 10 and 40.

In the following collection pages, you will find "Dementia friendly" designs flagged with this logo. And for more information, please contact your local Tarkett sales rep.

INSTALLING FLOORING TO ENSURE LONG LIFE

Tarkett has a wide variety of techniques and tips to ensure perfect installation and keep your flooring in good condition for years to come.


STEPS IN INSTALLING

1. Subfloor control



- The subfloor must be sound, hard, flat, clean and free from all types of marks, debris & residues, and not exposed to humidity.
- Absorbency must be checked and when needed, treated with a primer to have moderately absorbent subfloor.
- Refer to local standards for detailed rules and control methods.
- Stop underfloor heating for minimum 48h before installation and maintain the temperature in the room with an alternative heating source.

2. Before installation

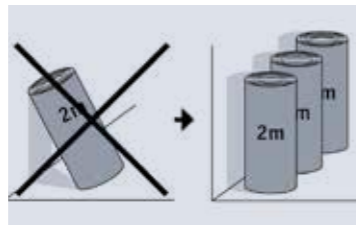

- Store 2m large rolls vertically in storage area. Larger rolls should be stored horizontally.
- Let the flooring acclimatize at least 24h before laying and cut sheets should be relaxed another 24h, both at room temperature.
- Define your layout to ensure whenever possible that joins do not coincide with doorways and main traffic lanes.
- If the room is square, the sheets should run parallel to the incoming light. In long, narrow rooms the sheets can be installed along the length of the room.

3. Rolls installation



- Butt joint when edges are straight, if not, overlap the edges and trim the two sheets simultaneously (double cut method).
- Fold the first half of the sheets.
- Apply acrylic adhesive with a spatula (TKB A1 for compact, TKB A2 for acoustic) - refer to adhesive manufacturer's instruction for waiting time.
- Fold back the first half of the flooring into the adhesive and press.
- Repeat this operation on the other half
- Excess of material close to walls and obstacles can be trimmed/flushed (freehand cut).
- Use a heavy roller on the whole surface to ensure final bonding.

4. Hot welding



- Wait minimum 24h after installation.
- Hot weld with 4mm PVC welding rod: groove (2/3 of the compact layer) and weld at approx. 400°C with a hot speed nozzle.
- Trim the welding rod in 2 steps (immediately and after 5 minutes) with a Mozart knife.

5. After installation

- Clean working area from all adhesive marks, stains and dust.
- Prevent soiling by protecting the area.
- Open the area to normal traffic 48 hours after installation and move furnitures after 72 hours.

For more detailed explanations, or specific installation methods (cove forming, tiles installation, Acczent & Tapiflex Genius loose-lay installation), please refer to full installation notice. Please contact your local representative for any questions. Tarkett accepts no liability for adhesives and levelling compounds used, including those recommended.

A METHODOICAL APPROACH TO CLEANING

Tarkett's PUR surface treatment facilitates cleaning and decreases the need for water and solvents, reducing environmental impact. Regular and attentive cleaning maintains flooring in between periodic deep-clean buffing sessions.

General Advice

- Clean the floorcovering regularly, as this is more cost-effective and hygienic than occasional heavy-duty cleaning.
- Black rubber wheels and rubber feet can discolour the floorcovering. All chair and table legs should have good quality floor protectors. Felt pads are not recommended in commercial interiors. Hard plastic is preferred.
- Install doormats at the entrance of the buildings to catch humidity, dirt, dust etc. They must be at least three strides long (approx. 1.5 m).
- Always follow manufacturers' recommendations (detergent, cleaning machine...).

SETTING IN TRAFFIC	ACTIONS	INSTRUCTIONS
	1. Removing dust and gravel	- Dry mopping. - Vacuum cleaning.
	2. Cleaning	- Mechanical cleaning with scrubbing machine - red pad, medium speed - and water vacuuming, or combined machine. - Use neutral detergent (pH 6/8) or alkaline detergent (pH 8/12) in case of heavy soiling. - If an alkaline detergent (pH 8/12) is used, the flooring should be rinsed with water and water vacuumed.
	3. Stain removal	- A detergent should be used to remove work-site stains (glue, paint...) according to the nature of the stain. - Do not use abrasive pads.

DAILY CLEANING	ACTIONS	INSTRUCTIONS
	1. Removing dust and gravel	- Dry mopping. - Vacuum cleaning.
	2. Cleaning (if and where it's necessary)	- With flat or micro fibre mop, impregnated or not. or - With a combined machine (red pad, medium speed). - Use neutral detergent (pH 6/8).
	3. Stain removal	- For stubborn stains on the floor, use an alkaline detergent (pH 9/10) dilution according manufacturer instruction, let it work during 1 minute and sweep with a white clean cloth.

PERIODICAL CLEANING	ACTIONS	INSTRUCTIONS
	1. Light soiling	- Machine cleaning: use a scrubbing machine fitted out with soft white brushes or red pads at medium speed - Use detergent neutral or alkaline (pH 7/9)
	2. Heavy soiling	- Apply a cleaning solution (pH 10-11, after dilution) to the flooring and allow to act for 5-10 min. - Machine cleaning: use a scrubbing machine fitted out with soft white brushes or red pads at medium speed. - Vacuum up the soiled water immediately. - Rinse with clean water and allow the floor to dry.
	3. Stain removal	- For stubborn stains on the floor, use an alkaline detergent (pH 9/10) dilution according manufacturer instruction, let it work during 1 minute and sweep with a white clean cloth.

					ACCENT EXCELLENCE/TAPIFLEX EXCELLENCE (ROLLS TO BE GLUED)		EXCELLENCE GENIUS (LOOSE-LAY)		TAPIFLEX TILES (TO BE GLUED)	TAPIFLEX STAIRS	MATCHING SKIRTINGS	MATCHING WR	
Design	Colour	NCS	NCS lightness (%)	LRV (%)	Accent (Compact)	Tapiflex (Acoustic)	Accent (Compact)	Tapiflex (Acoustic)	Tapiflex (Acoustic)		KS 61	Unicolour	Multicolour
BRUSHED ALU	GREY	S 4500-N	0,54	26,5	25130100	25135100	✓*	✓*	✓*	ESQUISSE STAIRS light grey 25171018	206009012	1287006	
	COLD MIX	S 2500-N	0,74	39	25130143	25135143	✓*	✓*	✓*	UNI STAIRS medium alu 25172118	206009014	1287412	
BUBBLES	WARM MIX	S 2500-N	0,74	44,3	25130142	25135142	✓*	✓*	✓*	UNI STAIRS medium alu 25172118	206009010	1287412	
	INTENSE JEAN	S 6005-R80B	0,36	19	25128107	25133107	25223107	25226107	✓*	UNI STAIRS medium alu 25172118	206009007	1292450	
CARPET	INTENSE OLIVE	S 4010-G90Y	0,56	27,6	25128106	25133106	✓*	✓*	✓*	CONCRETE STAIRS cool grey 25171000	206009007	1287330	
	WHITE GREY	S 2502-Y	0,73	41,5	25128108	25133108	25223108	25226108	✓*	TISSAGE STAIRS soft grege 25171032	206009010	1287716	
	CHALK	S 2502-Y	0,73	46,3	25128502	25133502	25223502	25226502	25185502	TISSAGE STAIRS soft grege 25171032	206009008	1287572	
CONCRETE	COOL GREY	S 3500-N	0,64	36,3	25128500	25133500	25223500	25226500	25185500	CONCRETE STAIRS cool grey 25171000	206009010	1287524	
	DARK GREY	S 6502-Y	0,34	12,6	25128501	25133501	25223501	25226501	✓*	UNI STAIRS medium alu 25172118	206009006	1287585	
	GREY BEIGE	S 3005-Y20R	0,67	33,4	25128503	25133503	25223503	25226503	✓*	TISSAGE STAIRS soft grege 25171032	206009008	1287713	
	STEEL BLUE	S 6500-N	0,35	13,2	25128507	25133507	✓*	✓*	✓*	ESQUISSE STAIRS dark grey 25171015	1411 053	1287836	
	WARM GREY	S 6005-Y20R	0,38	18,8	25128504	25133504	✓*	✓*	✓*	ESQUISSE STAIRS light grey 25171018	206009010	1287870	
	BRIGHT ANIS	S 5020-B50G	0,39	31,7	25130164	25135164	✓*	✓*	-	UNI STAIRS bright anis 25172121	206009007	1294073	
CUBIC	BRIGHT ICE BLUE	S 2020-B60G	0,71	32,7	25130165	25135165	✓*	✓*	-	UNI STAIRS bright ice blue 25172122	206009013	1294073	
	BRIGHT ORANGE	S 1070-Y70R	0,53	25,1	25130162	25135162	✓*	✓*	-	UNI STAIRS bright orange 25172119	206009006	1294073	
	BRIGHT YELLOW	S 2050-Y	0,69	31,4	25130163	25135163	✓*	✓*	-	UNI STAIRS bright yellow 25172120	206009007	1294073	
	INTENSE PETROLE	S 5020-B30G	0,57	22,5	25130166	25135166	✓*	✓*	-	UNI STAIRS grey 25172117	206009013	1294073	
	DARK BEIGE	S 4005-Y20R	0,39	26,2	25130167	25135167	✓*	✓*	-	UNI STAIRS dark beige 25172116	206009007	1294073	
	BLUE	S 5030-R90B	0,30	11,6	25128123	25133123	✓*	✓*	-	UNI STAIRS medium grey 25172123	206009007	1287515	
DIAMOND	BLUE GREEN	S 5030-B30G	0,32	12,5	25128124	25133124	✓*	✓*	-	UNI STAIRS bright ice blue 25172122	206009007	1287461	
	GREY	S 6500-N	0,35	15,5	25128125	25133125	✓*	✓*	-	UNI STAIRS medium alu 25172118	206009007	1287753	
	ORANGE	S 2060-Y70R	0,47	20,9	25128122	25133122	✓*	✓*	-	NEON STAIRS bright orange 25172026	206009007	1287517	
	GREY	S 3502-B	0,62	40	25130183	25135183	✓*	✓*	✓*	UNI STAIRS medium grey 25172123	1411 041	1287845	
DIGITAL WAVE	GREY ANIS	S 6502-Y	0,34	14,5	25130184	25135184	✓*	✓*	✓*	NEON STAIRS bright anis 25172028	206009006	1287647	
	GREY ICE BLUE	S 6500-N	0,35	14,4	25130182	25135182	✓*	✓*	✓*	NEON STAIRS bright ice blue 25172029	1411 056	1287836	
	BLACK & WHITE	S 7500-N	0,26	9	25128189	25133189	✓*	✓*	✓*	UNI STAIRS medium alu 25172118	1411 047	1287529	
ENCRYPTION	DARK GREY	S 6500-N	0,35	14,9	25128015	25133015	✓*	✓*	25185015	ESQUISSE STAIRS dark grey 25171015	206009006	1287375	
	GREY BEIGE	S 2502-Y	0,73	47,3	25128012	25133012	✓*	✓*	✓*	ESQUISSE STAIRS light grey 25171018	206009009	1287572	
	LIGHT CHOCOLATE	S 6005-Y50R	0,38	20	25128017	25133017	✓*	✓*	✓*	ESQUISSE STAIRS light grey 25171018	206009005	1287458	
	LIGHT GREY	S 4502-Y	0,53	30,6	25128013	25133013	✓*	✓*	25185013	ESQUISSE STAIRS light grey 25171018	206009006	1287854	
	MEDIUM GREY	S 6000-N	0,40	19	25128014	25133014	25223014	25226014	25185014	ESQUISSE STAIRS dark grey 25171015	206009006	1287832	
	ANIS	S 2050-G90Y	0,69	39,4	25128114	25133114	✓*	✓*	✓*	UNI STAIRS bright anis 25172121	1411 036	1287137	
FACET	BEIGE	S 5010-Y10R	0,48	28,6	25128119	25133119	✓*	✓*	✓*	UNI STAIRS dark beige 25172116	206009013	1287830	
	BLACK & WHITE	S 5500-N	0,44	21,8	25128118	25133118	✓*	✓*	✓*	ESQUISSE STAIRS light grey 25171018	1 11 039	1287840	
	BLUE	S 5030-R80B	0,28	8	25128120	25133120	✓*	✓*	✓*	UNI STAIRS medium grey 25172123	206009010	1287580	
	FONTE	S 5502-B	0,43	12,5	25128117	25133117	✓*	✓*	✓*	UNI STAIRS grey 25172117	206009007	1287392	
	MID GREY	S 4000-N	0,59	32,2	25128116	25133116	✓*	✓*	✓*	UNI STAIRS medium grey 25172123	206009009	1287831	
	ORANGE	S 2060-Y70R	0,47	25,1	25128112	25133112	✓*	✓*	✓*	UNI STAIRS bright orange 25172119	1411 047	1287158	
	PRUNE	S 6020-R10B	0,26	9,3	25128121	25133121	✓*	✓*	✓*	UNI STAIRS dark beige 25172116	206009009	1287649	
	WATER	S 4020-B70G	0,49	25,3	25128115	25133115	✓*	✓*	✓*	UNI STAIRS bright ice blue 25172122	1411 036	1288311	
	YELLOW	S 2050-Y10R	0,69	39,9	25128113	25133113	✓*	✓*	✓*	UNI STAIRS bright yellow 25172120	1411 048	1287653	
	RAINBOW	S 2000-N	0,79	48,1	25128170	25133170	✓*	✓*	✓*	UNI STAIRS medium alu 25172118	1411 055	1287837	
FLOCONS²	RED	S 2050-Y90R	0,50	25,2	25128169	25133169	✓*	✓*	✓*	UNI STAIRS medium alu 25172118	1411 048	1287868	
	BEIGE	S 3005-Y20R	0,67	36,3	25130173	25135173	✓*	✓*	✓*	TISSAGE STAIRS soft grege 25171032	206009011	1287707	
	BRIGHT ORANGE	S 2060-Y70R	0,47	25,4	25130178	25135178	✓*	✓*	✓*	UNI STAIRS bright orange 25172119	1411 047	1287154	
	BRIGHT VIOLET	S 4040-R30B	0,29	14,2	25130177	25135177	✓*	✓*	✓*	NEON STAIRS bright orange 25172026	1411 020	1287823	
	DARK GREY	S 6000-N	0,40	16,6	25130172	25135172	✓*	✓*	✓*	FUSION LINES STAIRS dark grey 25172025	206009014	1287842	
	INTENSE OLIVE	S 3030-G90Y	0,63	32,9	25130175	25135175	✓*	✓*	✓*	NEON STAIRS bright anis 25172028	206009006	1287878	
	INTENSE PETROLE	S 5020-B30G	0,39	14,2	25130174	25135174	✓*	✓*	✓*	NEON STAIRS bright ice blue 25172029	206009026	1287201	
	PHOSPHO	S 4500-N	0,54	28,7	25130171	25135171	✓*	✓*	✓*	FUSION LINES STAIRS phospho 25172024	206009009	1287861	
	TURQUOISE	S 4040-B10G	0,34	16,3	25130176	25135176	✓*	✓*	✓*	NEON STAIRS bright ice blue 25172029	206009026	1287564	
GRANITO	COOL GREY	S 3000-N	0,70	40,8	25128111	25133111	✓*	✓*	✓*	CONCRETE STAIRS cool grey 25171000	206009010	1287027	
	LIGHT BEIGE	S 2005-Y30R	0,78	50,4	25128109	25133109	✓*	✓*	✓*	GRANITO STAIRS beige 25171013	206009011	1287069	
	WARM GREY	S 3005-Y50R	0,65	37,3	25128110	25133110	25223110	25226110	✓*	GRANITO STAIRS grey 25171012	1411 019	1287530	
MATRIX²	BRIGHT ANIS	S 2050-G80Y	0,69	40,2	25131186	25136186	25224186	25227186	✓*	UNI STAIRS bright anis 25172121	1411 051	1287598	
	BRIGHT ORANGE	S 2060-Y70R	0,47	23,1	25131188	25136188	✓*	✓*	✓*	UNI STAIRS bright orange 25172119	1411 056	1287646	
	BRIGHT TURQUOISE	S 3040-B40G	0,49	24,6	25131185	25136185	25224185	25227185	✓*	UNI STAIRS bright ice blue 25172122	1411 051	1287019	
	BRIGHT YELLOW	S 2050-Y10R	0,69	42,9	25131187	25136187	✓*	✓*	✓*	UNI STAIRS bright yellow 25172120	1411 050	1287595	
	DARK GREY	S 5500-N	0,44	24	25131019	25136019	✓*	✓*	✓*	UNI STAIRS dark beige 25172116	206009030	1287444	
	GRAPHITE	S 6005-R80B	0,36	15,5	25131000	25136000	✓*	✓*	✓*	UNI STAIRS medium grey 25172123	206009009	1287077	
	PHOSPHO	S 2002-B	0,77	46,7	25131101	25136101	✓*	✓*	✓*	UNI STAIRS medium grey 25172123	1411 049	1287523	
ORIGAMI NUMBERS	ANIS	S 6502-B	0,33	18,7	25130179	25135179	✓*	✓*	-	NEON STAIRS bright anis 25172028	206009007	1287381	
	DARK GREY	S 6502-B	0,33	19,7	25130181	25135181	✓*	✓*	-	UNI STAIRS grey 25172117	206009007	1287392	
	LIGHT GREY	S 3500-N	0,64	30,3	25130180	25135180	✓*	✓*	-	UNI STAIRS medium grey 25172123	206009009	1287027	
STEEL	GREY	S 5000-N	0,49	22,7	25128601	25133601	✓*	✓*	25185601	ESQUISSE STAIRS light grey 25171018	206009008	1287454	
TAPPED METAL	GREY	S 5500-N	0,44	18,8	25128126	25133126	✓*	✓*	✓*	ESQUISSE STAIRS light grey 25171018	206009008	1287842	

* possible on demand (MOQ & leadtime page 15)

EXCELLENCE TENDER SPECIFICATIONS

Tapiflex Excellence 80

The selected flooring similar to Tapiflex Excellence 80 belongs to the acoustic vinyl floors category under EN standard 649, available in 2m wide sheet with a Group T wear rating.

The product formulation does not contain phthalate-based plasticizer. It is built on a calendered backing layer made of recycled vinyl flooring material. It contains over 30% recycled material.

The product is built with a high density foam backing reinforced with glass fibre and a high quality printed design. The **wear layer of 0.80 mm** is reinforced with a UV photo-crosslinked polyurethane including particles of alumina TopClean XP™ treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations.

It has an **acoustic performance of 19 dB and a static indentation resistance ≤ 0.10 mm.**

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN standard 16516. Close to zero emission (quantification limit), TVOC, TSVOC and formaldehyde emissions are below 10 µg/m³.

It is free of formaldehyde and is 100% REACH compliant.

It is 100% recyclable and installation off-cuts can be collected and recycled in new products through the Tarkett ReStart® programme.

Tapiflex Excellence comes with a 10 Year Warranty.

Acczent Excellence 80

The selected flooring similar to Acczent Excellence 80 belongs to the compact vinyl floors category under ISO standard 10582, available in 2m wide sheet with a Type I binder content.

The product formulation does not contain phthalate-based plasticizer. It is built on a calendered backing layer made of recycled vinyl flooring material. It contains over 30% recycled material.

The wear layer of 0.80 mm is reinforced with a UV photo-crosslinked polyurethane including particles of alumina TopClean XP™ treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations. It has a static indentation resistance ≤ 0.03 mm.

Its emission rate of volatile organic compounds in air is very low, measured after 28 days according to EN standard 16516. Close to zero emission (quantification limit), TVOC, TSVOC and formaldehyde emissions are below 10 µg/m³.

It is free of formaldehyde and is 100% REACH compliant.

It is 100% recyclable and installation off-cuts can be collected and recycled in new products through the Tarkett ReStart® programme.

Acczent Excellence comes with a 10 Year Warranty.

More excellent reasons to choose Tarkett Excellence

- ✓ 100% Phthalate Free
- ✓ No formaldehyde
- ✓ 100% recyclable
- ✓ Test reports and certificates available upon request
- ✓ Optimal indoor air quality
- ✓ TVOC ≤ 10 µg/m³ after 28 days
- ✓ FloorScore® certified
- ✓ ISO 14001 certified production site
- ✓ REACH Compliant and CE Marking

SPECIFICATION DATA

The Excellence range, with its 132 decors offers one of the most highly creative heavy-traffic heterogeneous vinyl solutions on the market. The range is 100% phthalate free and the VOC in air emission rate is very low; less than 10 µg/m³. The range includes acoustic solutions (19dB) roll and tile formats and compact & acoustic loose-lay options, all with a 10 year product warranty.

TECHNICAL DATA	STANDARD	TAPIFLEX EXCELLENCE 80 (SHEET)	TAPIFLEX TILES 65	ACCZENT EXCELLENCE 80 (SHEET)	TAPIFLEX EXCELLENCE GENIUS 70	ACCZENT EXCELLENCE GENIUS 70
CLASSIFICATION						
Classification	EN 651	Heterogeneous Acoustic Vinyl	Heterogeneous Acoustic Vinyl	-	Heterogeneous Acoustic Vinyl	-
	EN ISO 10582	-	-	Heterogeneous Compact Vinyl	-	Heterogeneous Compact Vinyl
	EN ISO 10874	34	34	34-43	34	34-43
Wear group	EN 651	T	T	-	T	-
Wear layer binder content	EN ISO 10582	-	-	Type I	-	Type I
TECHNICAL CHARACTERISTICS						
Total thickness	EN ISO 24346	3.25 mm	3.45 mm	2.00 mm	3.50 mm	2.45 mm
Total weight	EN ISO 23997	3250g/m²	3417 g/m²	3100 g/m²	3680 g/m²	3400 g/m²
Wear layer thickness	EN ISO 24340	0.80 mm	0.65 mm	0.80 mm	0.70 mm	0.70 mm
Form of delivery	EN ISO 24341 (rolls)	approx. 23 running metres x 200 cm	-	approx. 23 running metres x 200 cm	approx. 23 running metres x 200 cm	approx. 23 running metres x 200 cm
	ISO 24342 (tiles)	-	50 x 50 cm - 20 tiles/box = 5.00 m²	-	-	-
PERFORMANCES FOR CE MARKING REQUIREMENTS (EN 14041)						
Declaration of Performance	EN 14041	0120-0074-DoP-2017-12	0120-0060-DoP-2014-05	0120-0004-DoP-2013-04	0120-093-DoP-2019-12	0120-092-DoP-2019-12
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _{fl} -s1 glued over any derivate wood substrate	B _{fl} -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) C _{fl} -s1 glued over any derivate wood substrate	B _{fl} -s1 glued over any A2 _{fl} or A1 _{fl} substrate (concrete) B _{fl} -s1 glued over any derivate wood substrate	C _{fl} -s1 loose-lay on an A1 _{fl} and / of A2 _{fl} substrate (concrete) C _{fl} -s1 loose-lay on a wooden sub-floor	B _{fl} -s1 loose-lay on an A1 _{fl} and / of A2 _{fl} substrate (concrete) C _{fl} -s1 loose-lay on a wooden sub-floor
Electrostatic properties	EN 1815	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV	≤ 2.0 kV
Thermal resistance	EN ISO 10456	0.04 m² K/W	0.04 m² K/W	0.02 m² K/W	0.04 m² K/W	0.02 m² K/W
Slip resistance	EN 13893	≥ 0.3	≥ 0.3	≥ 0.3	≥ 0.3	≥ 0.3
TECHNICAL PERFORMANCES						
Reaction to fire	EN ISO 24343-1	Required value: ≤ 0.20 mm Best measured value*: 0.08 mm Average measured value*: 0.10 mm	Required value: ≤ 0.20 mm Best measured value*: 0.10 mm Average measured value*: 0.12 mm	Required value: ≤ 0.10 mm Best measured value*: 0.01 mm Average measured value*: 0.13 mm	Required value: ≤ 0.20 mm Best measured value*: 0.10 mm Average measured value*: 0.12 mm	Required value: ≤ 0.10 mm Best measured value*: 0.01 mm Average measured value*: 0.03 mm
Impact sound reduction	NF EN ISO 717 / 2	ΔL _w = 19 dB	ΔL _w = 19 dB	-	ΔL _w = 19 dB	-
Acoustical improvement	NF S31-074	L _{w,av} < 65 dB - Class A	L _{w,av} < 65 dB - Class A	-	L _{w,av} < 65 dB - Class A	-
Slip resistance ⁽¹⁾	DIN 51130	R9/R10 Woods**	R9	R9/R10 Woods**	R9/R10 Woods**	R9/R10 Woods**
Furniture leg	EN 424	No damage	No damage	No damage	No damage	No damage
Castor chair	ISO 4918	No damage	No damage	No damage	No damage	No damage
Curl resultant to heat	EN ISO 23999	≤ 8 mm	≤ 2 mm	≤ 8 mm	≤ 3 mm	≤ 2 mm
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Dimensional stability	EN ISO 23999	< 0.10%	< 0.10%	< 0.10%	< 0.10%	< 0.10%
Chemical resistance	EN ISO 26987	Not affected	Not affected	Not affected	Not affected	Not affected
Underfloor heating		Suitable	Suitable	Suitable	Suitable	Suitable
ENVIRONMENTAL PERFORMANCES						
Total VOC emissions	ISO 16000-9	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
Formaldehyde	ISO 16000-3	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)	≤ 10 µg/m³ (after 28 days)
COLOURS						
		132	12	132	25 ready to order 107 with a minimum order quantity of 800m²	

The above information is subject to modification for the benefit of further improvement. (02/21).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



*For information - not binding. **Long Modern Oak, Oak Tree, Scandinavian Oak, Serene Oak.

⁽¹⁾Please note that slip resistance may be impacted by usage and cleaning operations.

According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com

Disclaimer : Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

