

iQ

HOMOGENEOUS VINYL


Perform
with style

CONTENTS

iQ NEW FOR LIFE	05
.....	
iQ SURFACE	10
.....	
iQ ONE	14
.....	
iQ NATURAL	18
.....	
iQ MEGALIT	22
.....	
iQ EMINENT	26
.....	
iQ GRANIT	30
.....	
iQ OPTIMA	36
.....	
iQ TORO SC / iQ GRANIT SD	42
.....	
iQ REFERENCES	46
.....	
iQ RANGE AND ACCESSORIES	54
.....	
TECHNICAL DATASHEETS	56
.....	

Front cover references

Sober Multi 21089 088
Sober Upper 21090 386

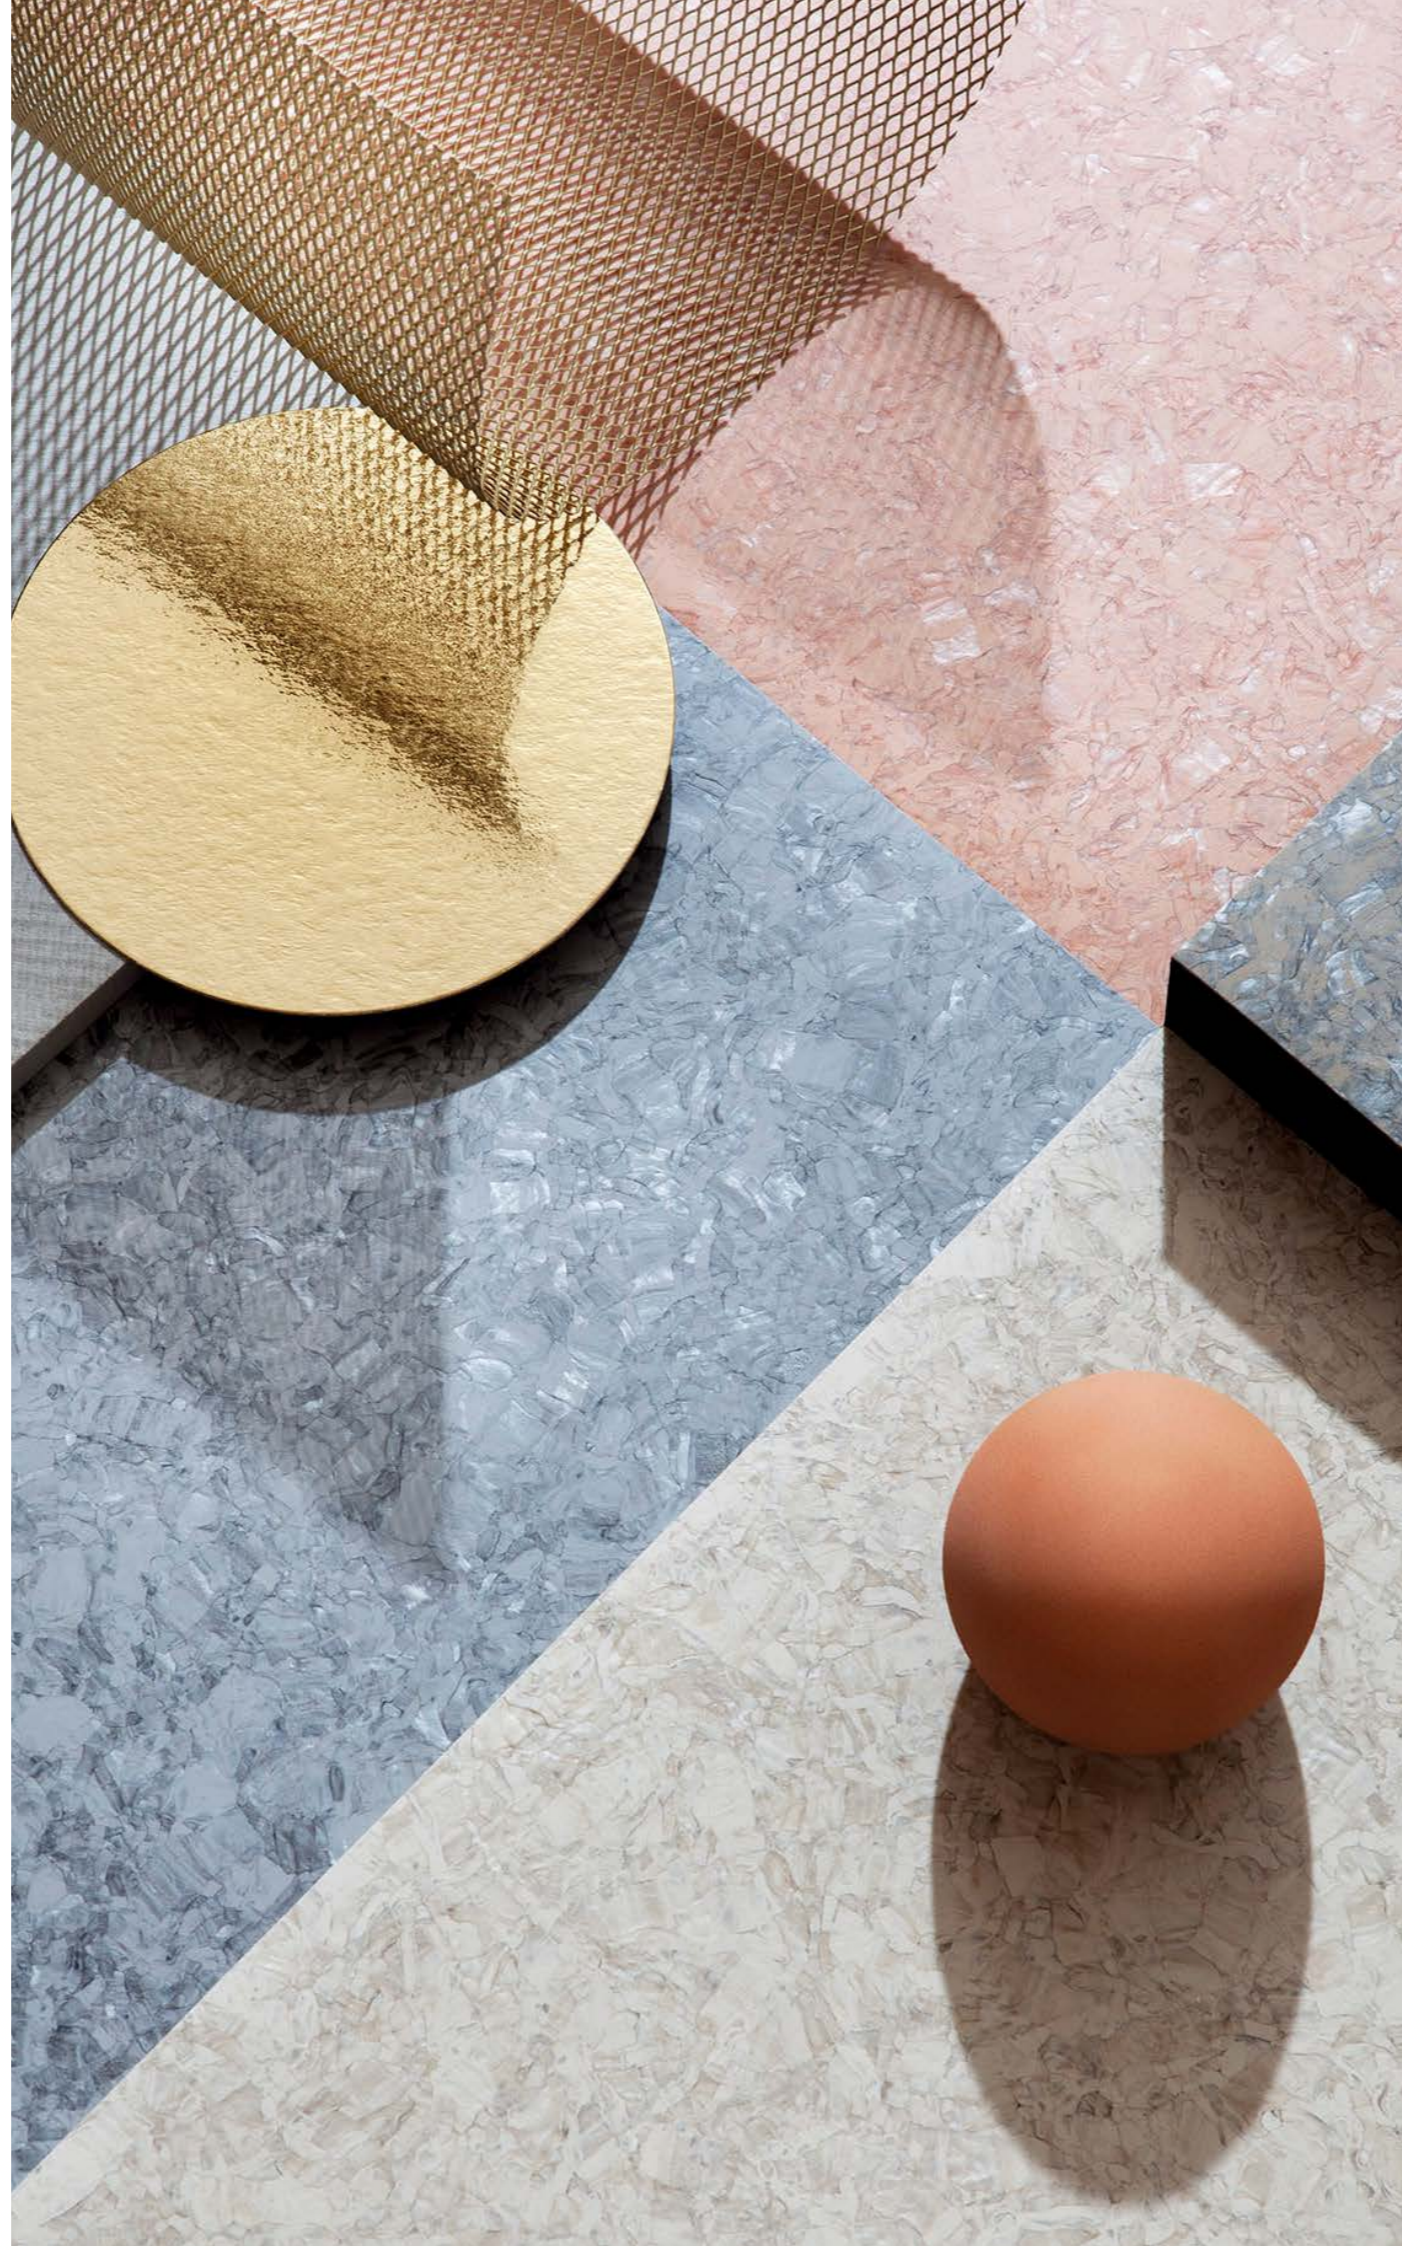

Suitable for any commercial environment, Tarkett iQ is the only homogeneous vinyl flooring to provide consistent long-term performance without compromising on design. Its ease of installation, outstanding durability, lowest life-cycle cost and treatment with unique dry-buffing restoration mean iQ outperforms everything else on the market. Factor in a colour palette covering the full spectrum plus designs ranging from classic to contemporary, and you will see why iQ is the perfect choice. Tarkett iQ homogeneous flooring isn't afraid of time. It will look the same even after 25 years.

For lifelong
performance

For a
sustainable
future

iQ
NEW FOR LIFE™

For lifelong
savings

For lifelong
style



iQ NEW FOR LIFE™ FOR LIFELONG PERFORMANCE

GENUINE HOMOGENEOUS FLOORING

The homogeneous structure and surface treatment ensure outstanding resistance to stains or scratches from heavy traffic. This product is a genuine homogeneous flooring with a true 2.0 mm wear layer.



NEW iQ NEXT-GENERATION SURFACE TREATMENT

All iQ ranges now come with a next-generation surface treatment that sets new standards in performance. Exclusive to Tarkett, it brings best-in-class protection against marks and stains, even from chemicals like Iodine and Betadine. Combined with our unique dry-buffing technology, it keeps iQ flooring new for life.

Previous PUR

Eosin 1% in Ethanol
2 hours' exposure after cleaning with Ethanol



New iQ Surface Treatment


Eosin 1% in Ethanol
2 hours' exposure after cleaning with Ethanol



iQ'S UNIQUE SURFACE-RESTORATION TECHNOLOGY

Unlike other solutions, iQ's new surface treatment offers class-leading performance FOR LIFE. The homogeneous structure means it can be dry buffed to provide the smooth, resilient surface needed for maximum hygiene and resistance to chemicals or staining in sensitive environments.

The homogeneous construction of iQ allows the products to be dry buffed for the true life of the product without any need for chemicals.

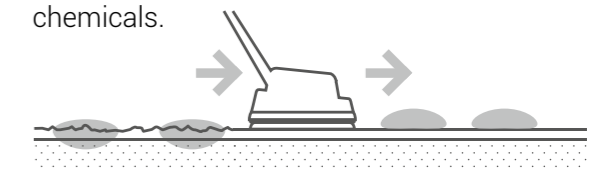

Small surface abrasions from traffic allow stains to penetrate and become embedded

Dry-buffing

Restored flooring after dry-buffing, ensuring a sealed, smooth surface to maximise hygiene




iQ NEW FOR LIFE™ FOR LIFELONG SAVINGS

EASY TO INSTALL

iQ vinyl flooring is fully flexible for a perfect coving and a watertight finish from floor to wall, making the installation faster and easier to achieve. Multi-colour welding rods for seamless finishing are available in a range of contrasting colours coordinated with flooring pattern designs.

A comprehensive range of accessories from stairs, tactile flooring to wetroom fittings for improved safety, guidance and protection, provides the finishing touch. And simpler, quicker installation means lower costs.

Welding rods

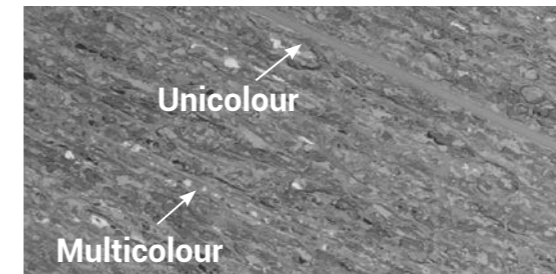

Coving




BEST LIFE CYCLE COST

Thanks to iQ unique surface restoration, the iQ ranges produce significant economies in the cost of cleaning and maintenance and provides the lowest life-cycle costs on the market. With no wax, no polish, ever, save 30% on maintenance and see payback within 3 years thanks to iQ's superior performance.

COMPARE FLOORING COSTS WITH LCC


Tarkett's Life-Cycle Cost (LCC) is a software specially developed to compare cleaning and maintenance costs across a range of flooring materials.

iQ vs polished floor: cleaning-cost comparison for a 700m² area (school environment)

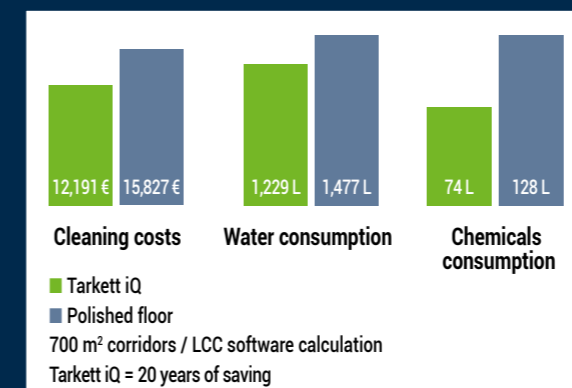

Source: LCC Software Calculation

iQ vs polished floor: cleaning-cost comparison for a 10,000m² area (hospital environment)

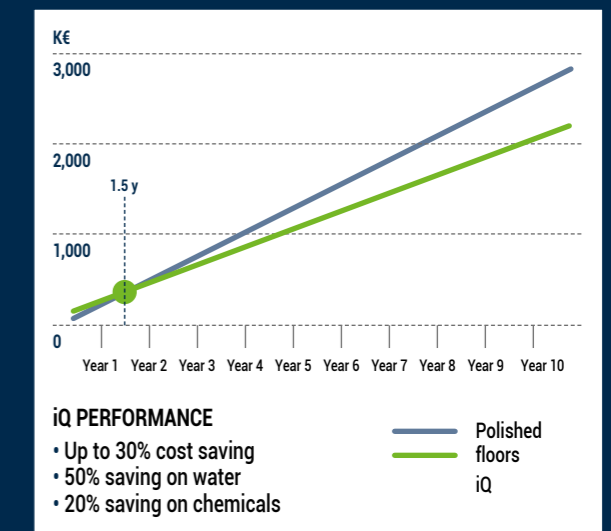


Source: LCC Software Calculation



iQ NEW FOR LIFE™ FOR LIFELONG STYLE

iQ consists of 7 collections, now available in 230 colours. Supported by a wealth of accessories, including colour welding rods, the iQ range represents a multi-format approach compatible with acoustic, slip-resistant and static-control environments.

This flexibility means you can create a single surface for a variety of moods and needs without compromising on performance.

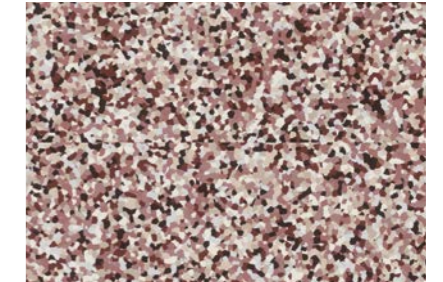

iQ Surface

Mix and match pattern and color families to unlock creativity

20 colours for floor/
7 for walls



iQ ONE

The non-PVC offer for demanding areas


10 colours in non-directional patterns



iQ NATURAL

The 1st vinyl flooring made with bio-attributed vinyl under the mass blance principles


35 colours in non-directional patterns

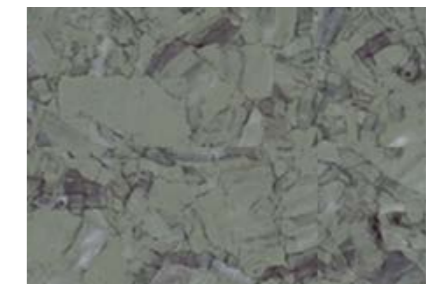

iQ MEGALIT

Megalith stones inspired design that stands out

18 colours in semi-directional patterns

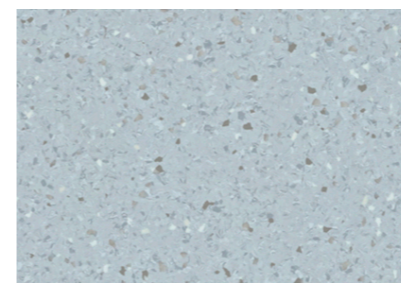

iQ EMINENT

A three-dimensional contrasted design to enhance demanding areas

26 colours in non-directional patterns



iQ GRANIT

Versatility that's always in style

50 colours in semi-directional patterns



iQ OPTIMA

The original, truly classic design

64 colours in directional patterns



iQ SURFACE

The iQ Surface collection wants to be used and experimented with; its new colourways invite combinations of tonal hues or poppy accents. A veritable designer's playground.





iQ SURFACE Rouge Multi
21089080



iQ SURFACE CONTRAST

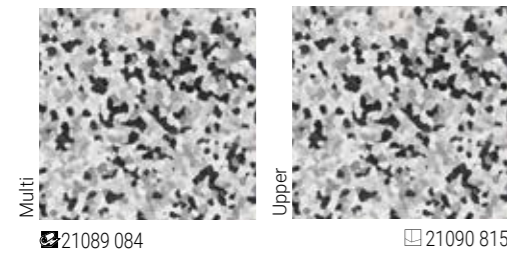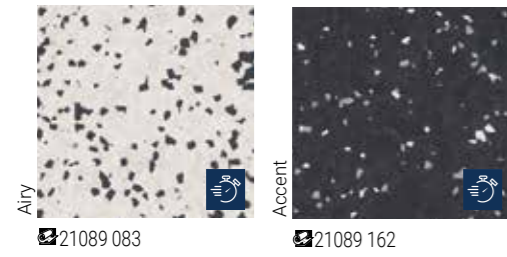

iQ SURFACE ROUGE

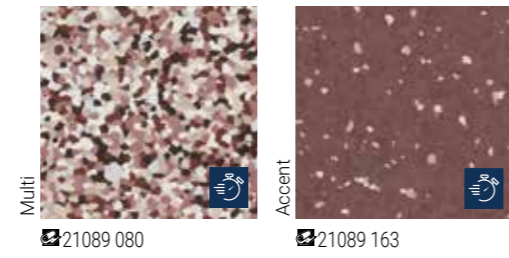
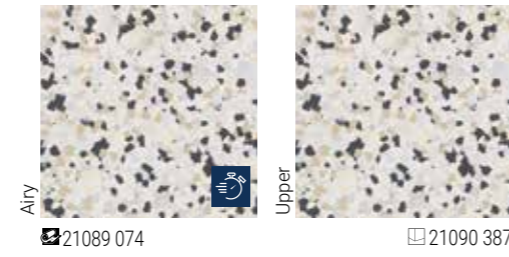


iQ SURFACE VIVID

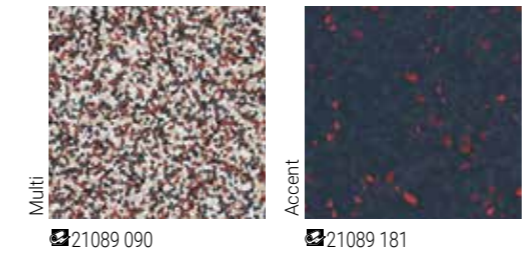
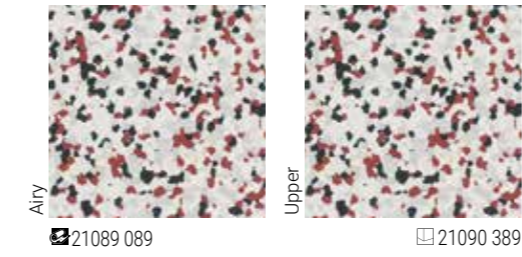


Locally stocked

iQ SURFACE SOBER

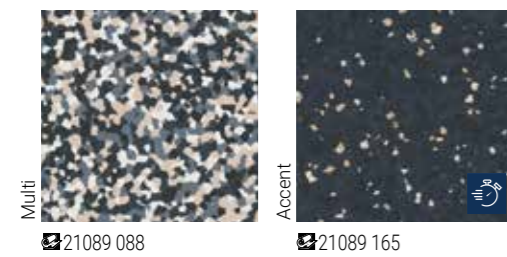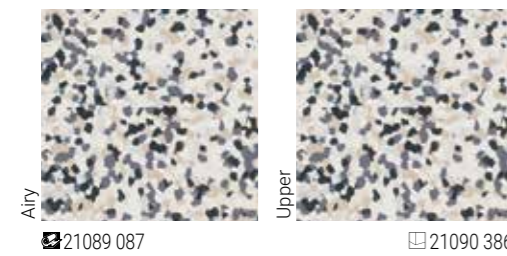

iQ SURFACE DIMMED

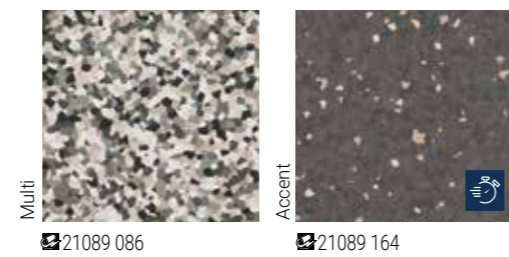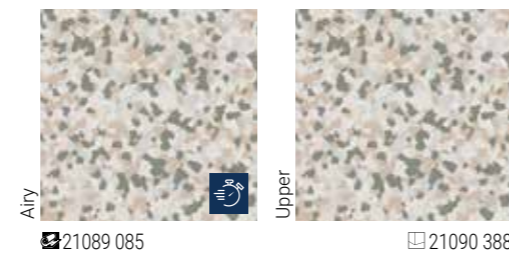

iQ SURFACE SOLID




iQ ONE





With an array of 38 colours and 3 non-directional patterns, this homogeneous non-PVC flooring presents the perfect blend of aesthetic appeal, flexibility and durability.





iQ ONE COLOURS



iQ ONE NEUTRALS



iQ ONE DUSTY



iQ ONE MISTY



iQ NATURAL

The new iQ Natural is the world's first floor with bio-attributed vinyl that replaces traditional fossil oil with renewable biomass feedstock – produced using mass balance principles and certified by third-party auditors, RSB.


iQ Natural provides architects, designers and property owners with a flooring solution with a greenhouse gas emission reduction of 50%, when compared to average homogeneous vinyl floors.*




iQ NATURAL DUSK




iQ NATURAL CRISP

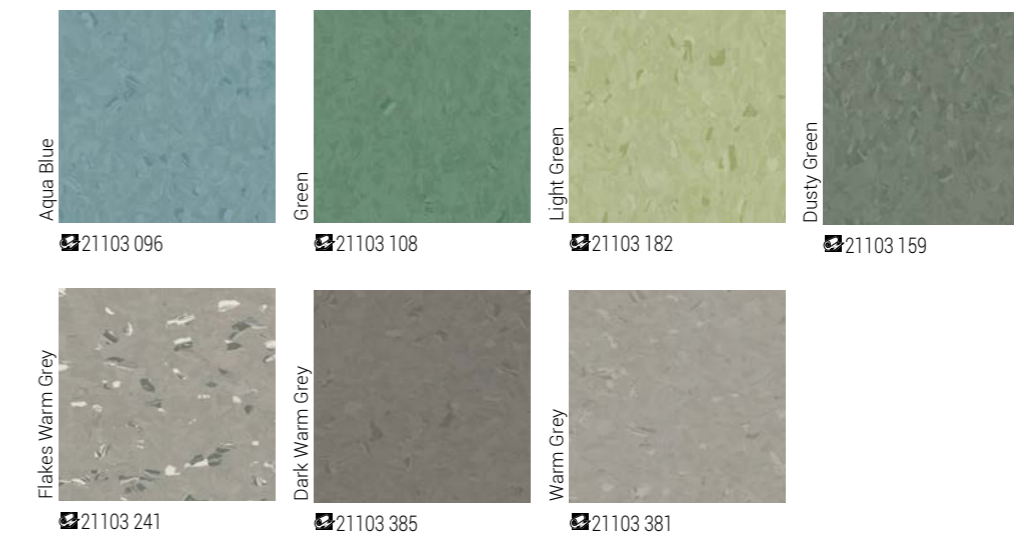



iQ NATURAL DAWN

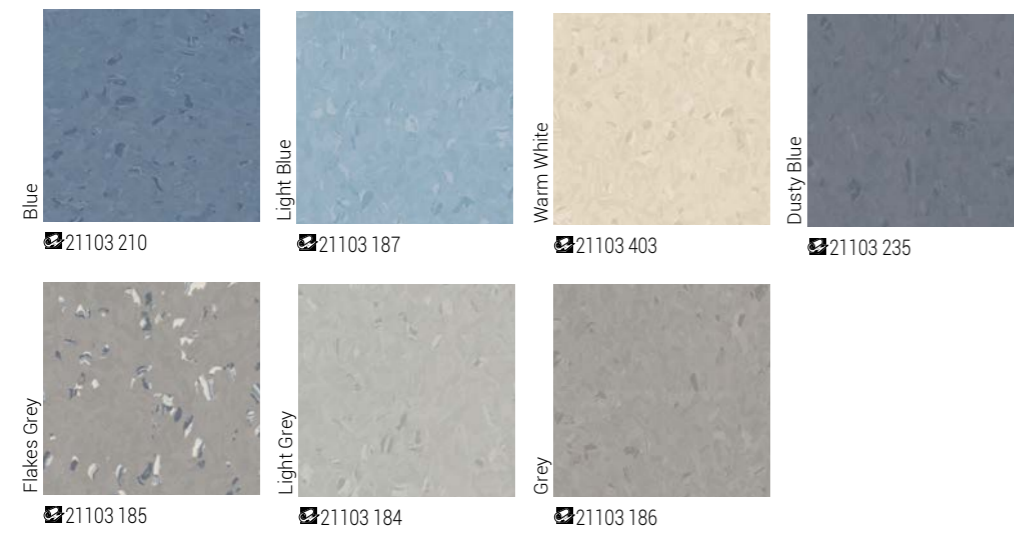

iQ NATURAL RADIANT

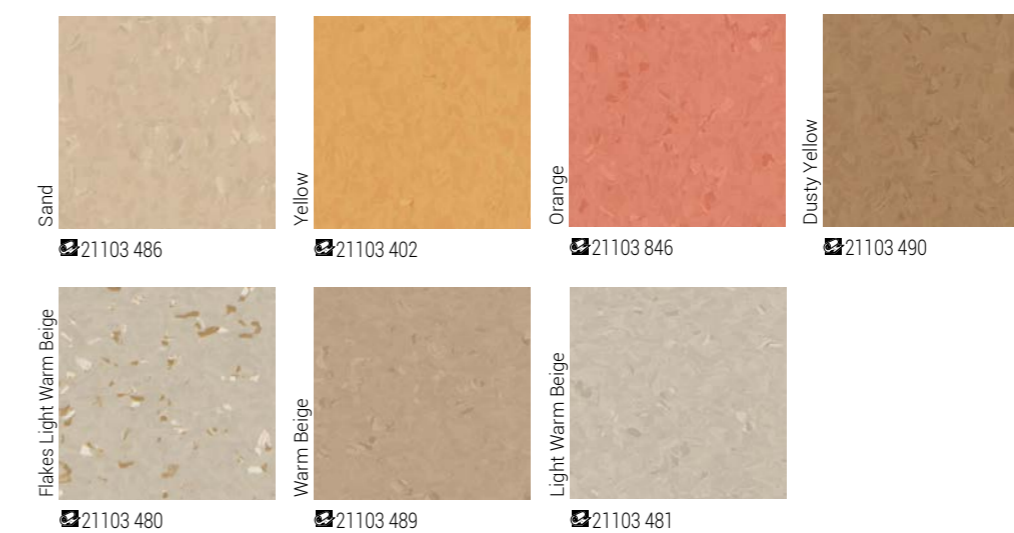


iQ NATURAL RELIEF

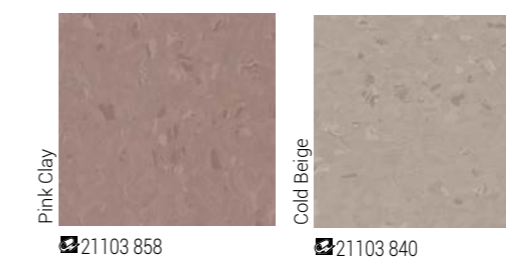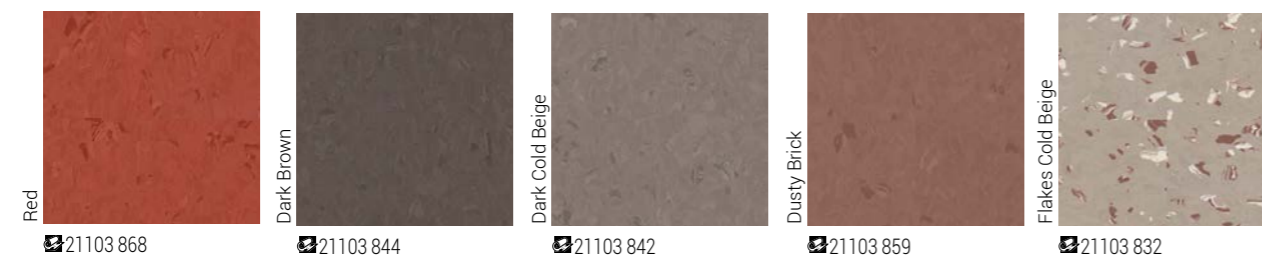

iQ MEGALIT

The pattern's extraordinary depth with its mineral texture gives iQ Megalit a vibrant, natural look that's highly distinctive.

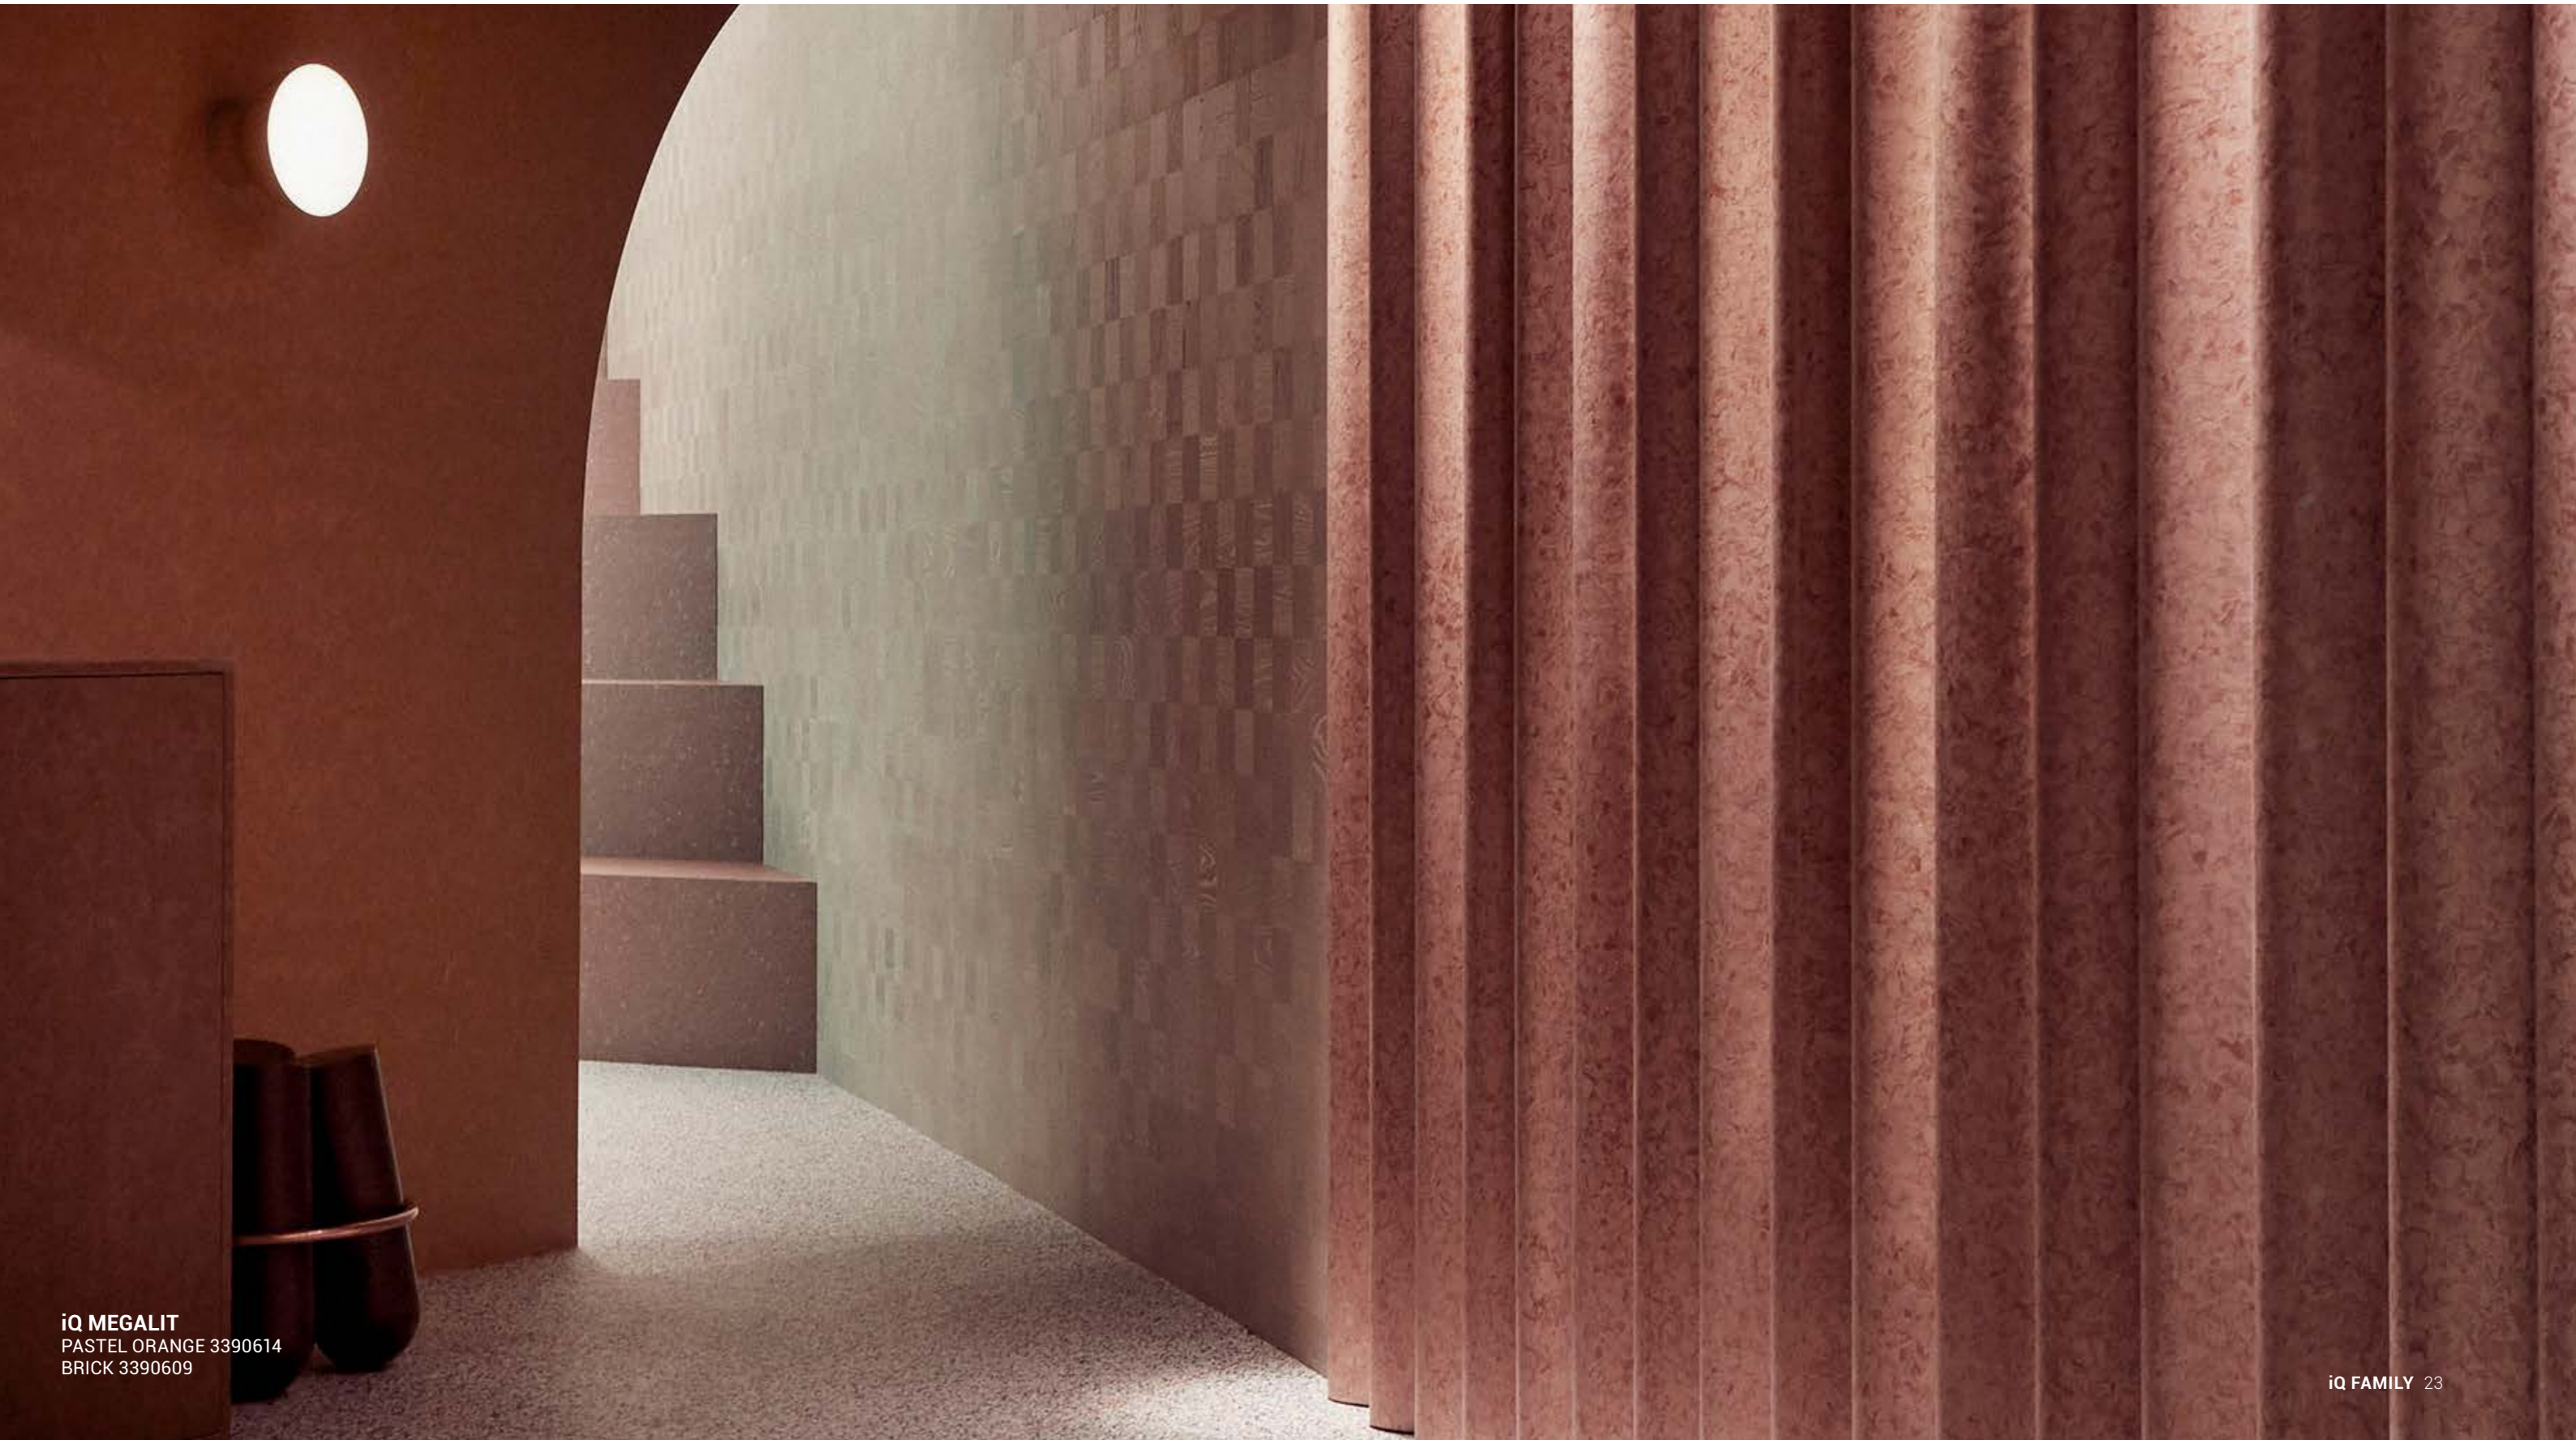


iQ MEGALIT

PEARL - PASTELS




iQ MEGALIT

GRAPHITE

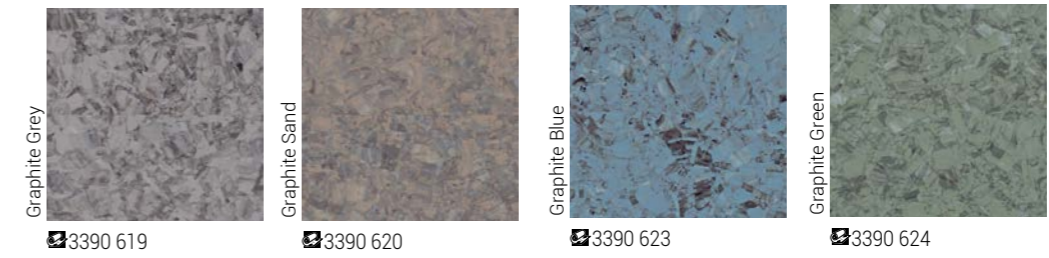

iQ MEGALIT

PEARL - NEUTRALS

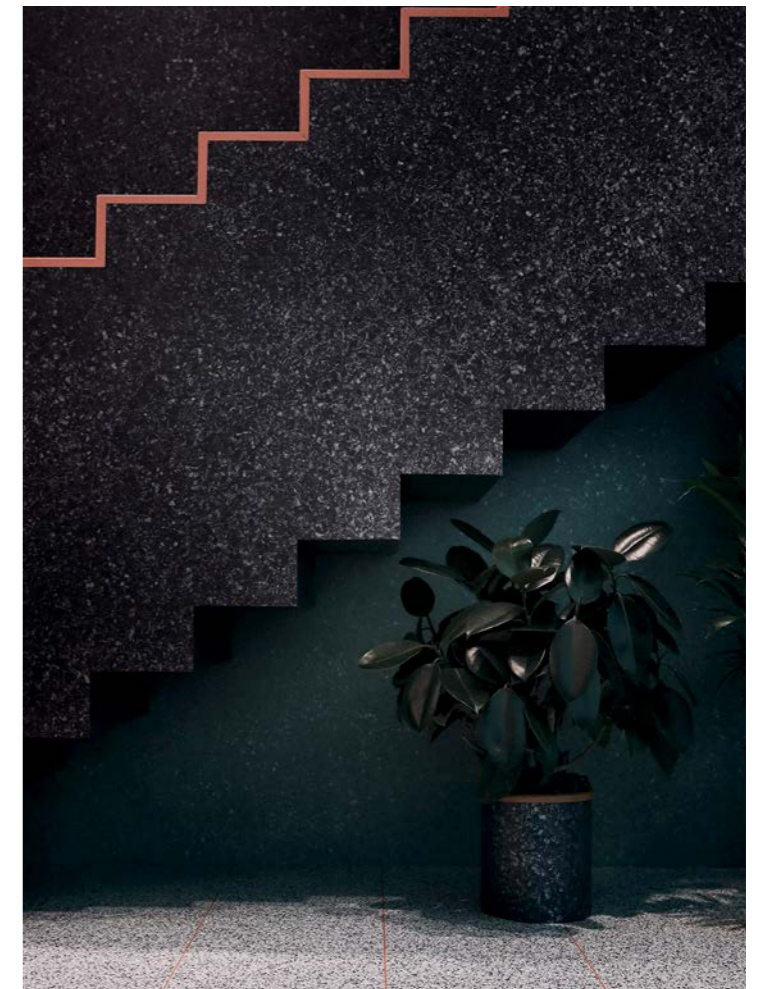

iQ EMINENT


Natural beige and grey shades complement a selection of primary and neutral colours for iQ Eminent's non-directional, 3-D design. Under the Unisense name, eight colour-coordinated options featuring a chip pattern offer a more stripped-back variation.

New
collection



iQ EMINENT


OXIDE

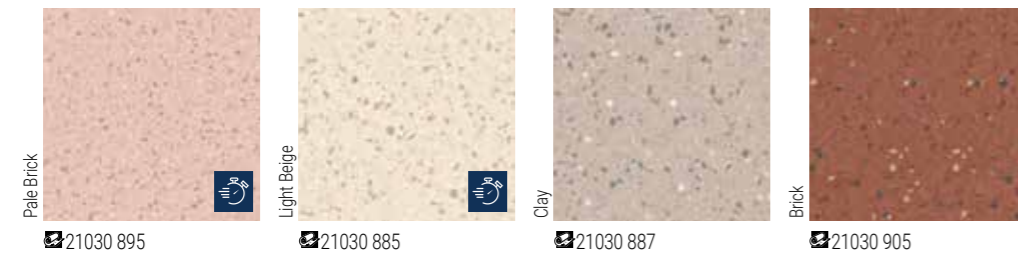


BASALT







ARGIL

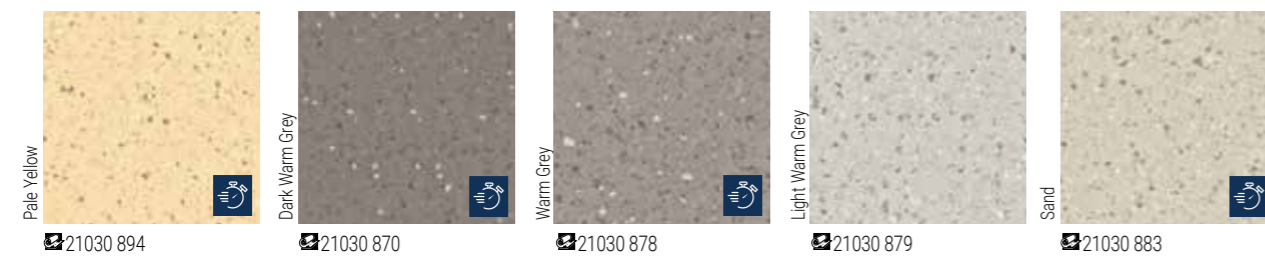


LICHEN

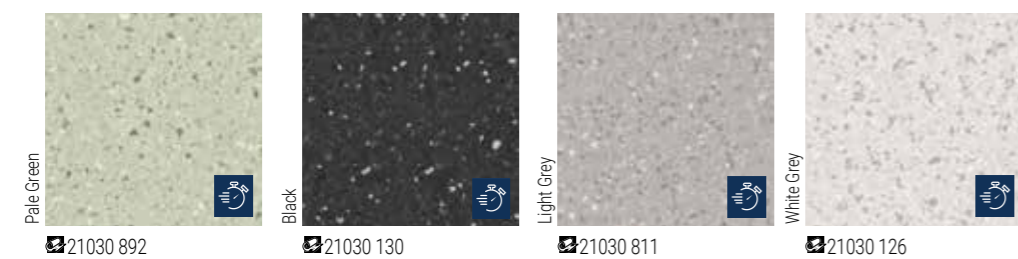

iQ EMINENT UNISENSE

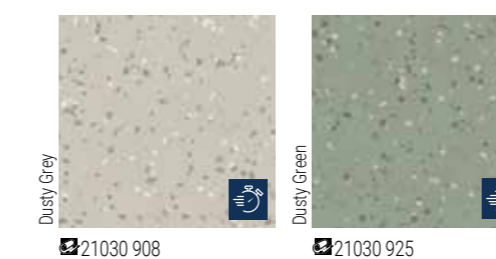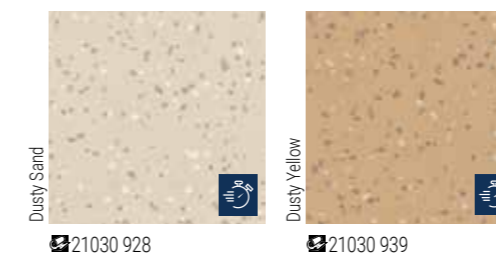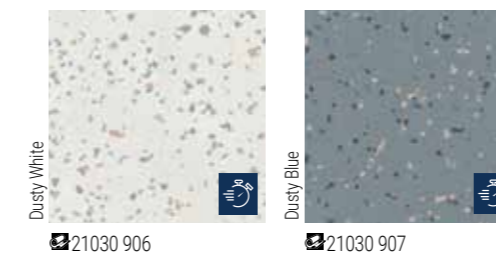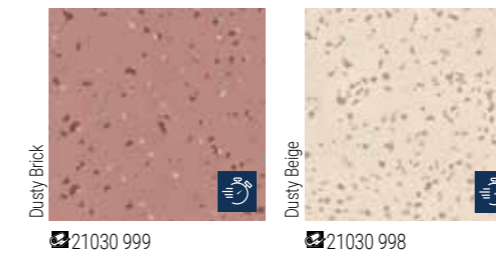

 Locally stocked

iQ GRANIT

For fresh, modern interiors with a sense of well-being, iQ Granit has the colour palette and patterns to perform. Choose from 50 different shades in soothing textures, including the special, low-contrast Micro, to create the right ambiance.

New
collection



iQ GRANIT
WHITE GREEN 21142338
LIGHT GREEN 21142390

iQ GRANIT


OXIDE




iQ GRANIT SENSE



BASALT

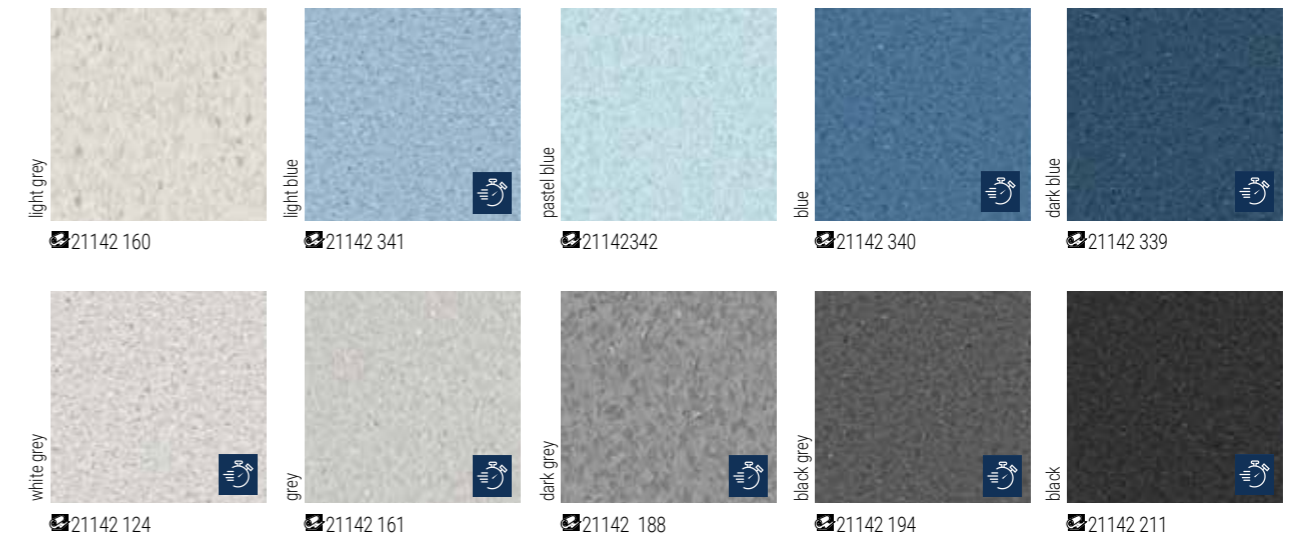

iQ GRANIT SENSE

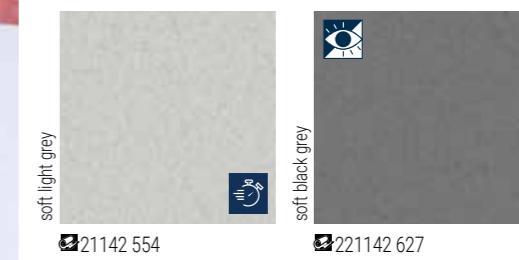


Locally stocked


Designs approved for environments used by people living with dementia

iQ GRANIT


ARGIL

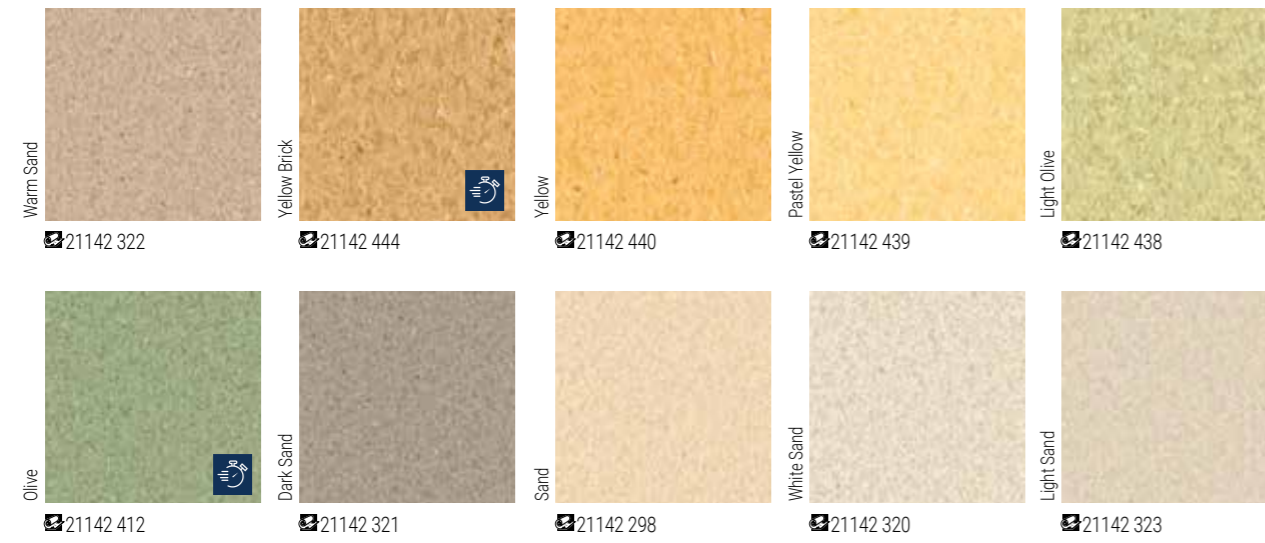


iQ GRANIT SENSE

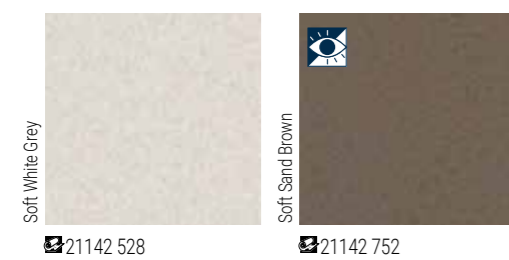

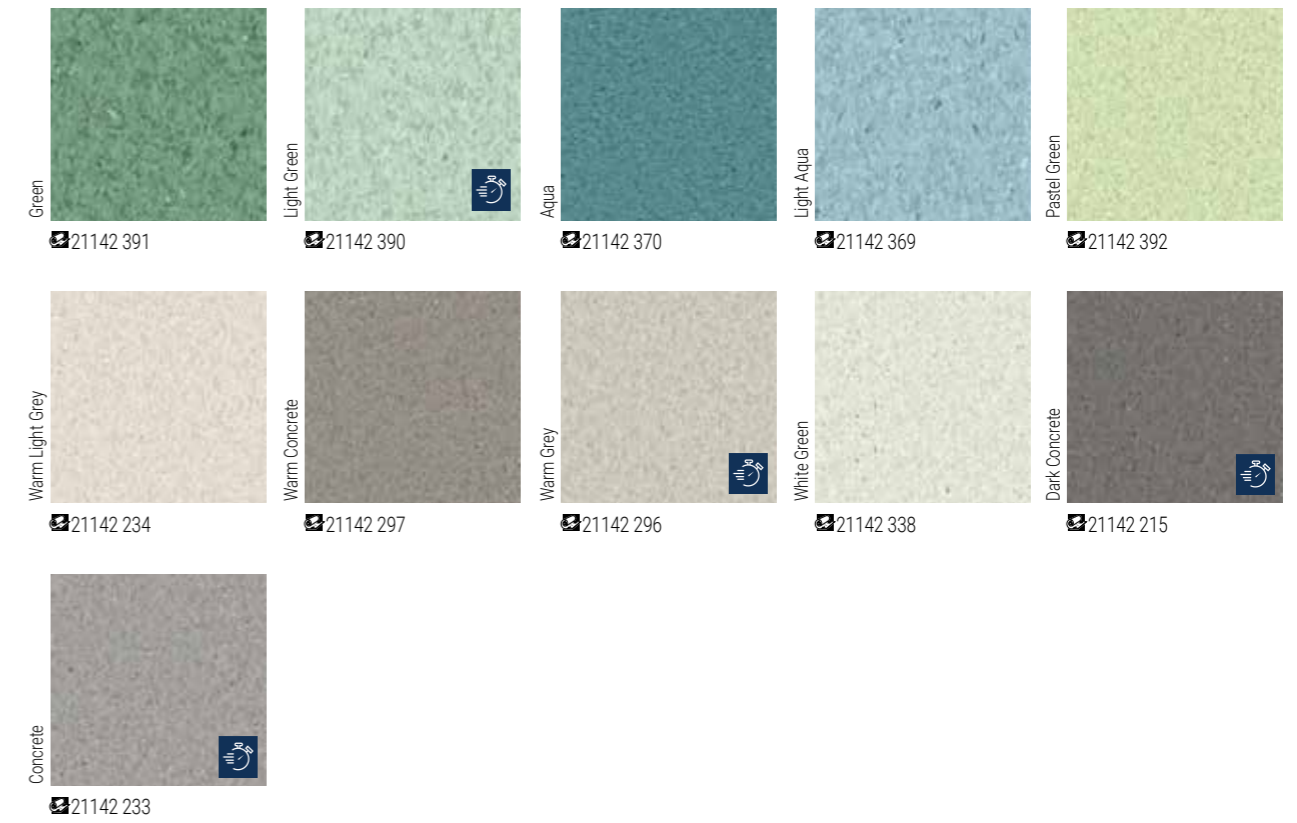

LICHEN

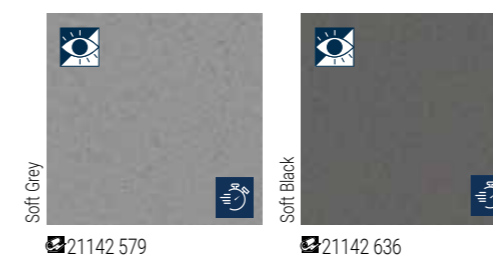

iQ GRANIT SENSE




 Locally stocked


 Designs approved for environments used by people living with dementia

iQ OPTIMA

The iQ Optima range takes homogeneous vinyl to the next level in aesthetics with 64 colours and 3 linear patterns: Neutrals is perfect for vibrant, lively spaces. Essence uses contrast to enhance busy areas. Mono features a softer, more harmonious style for calm settings.

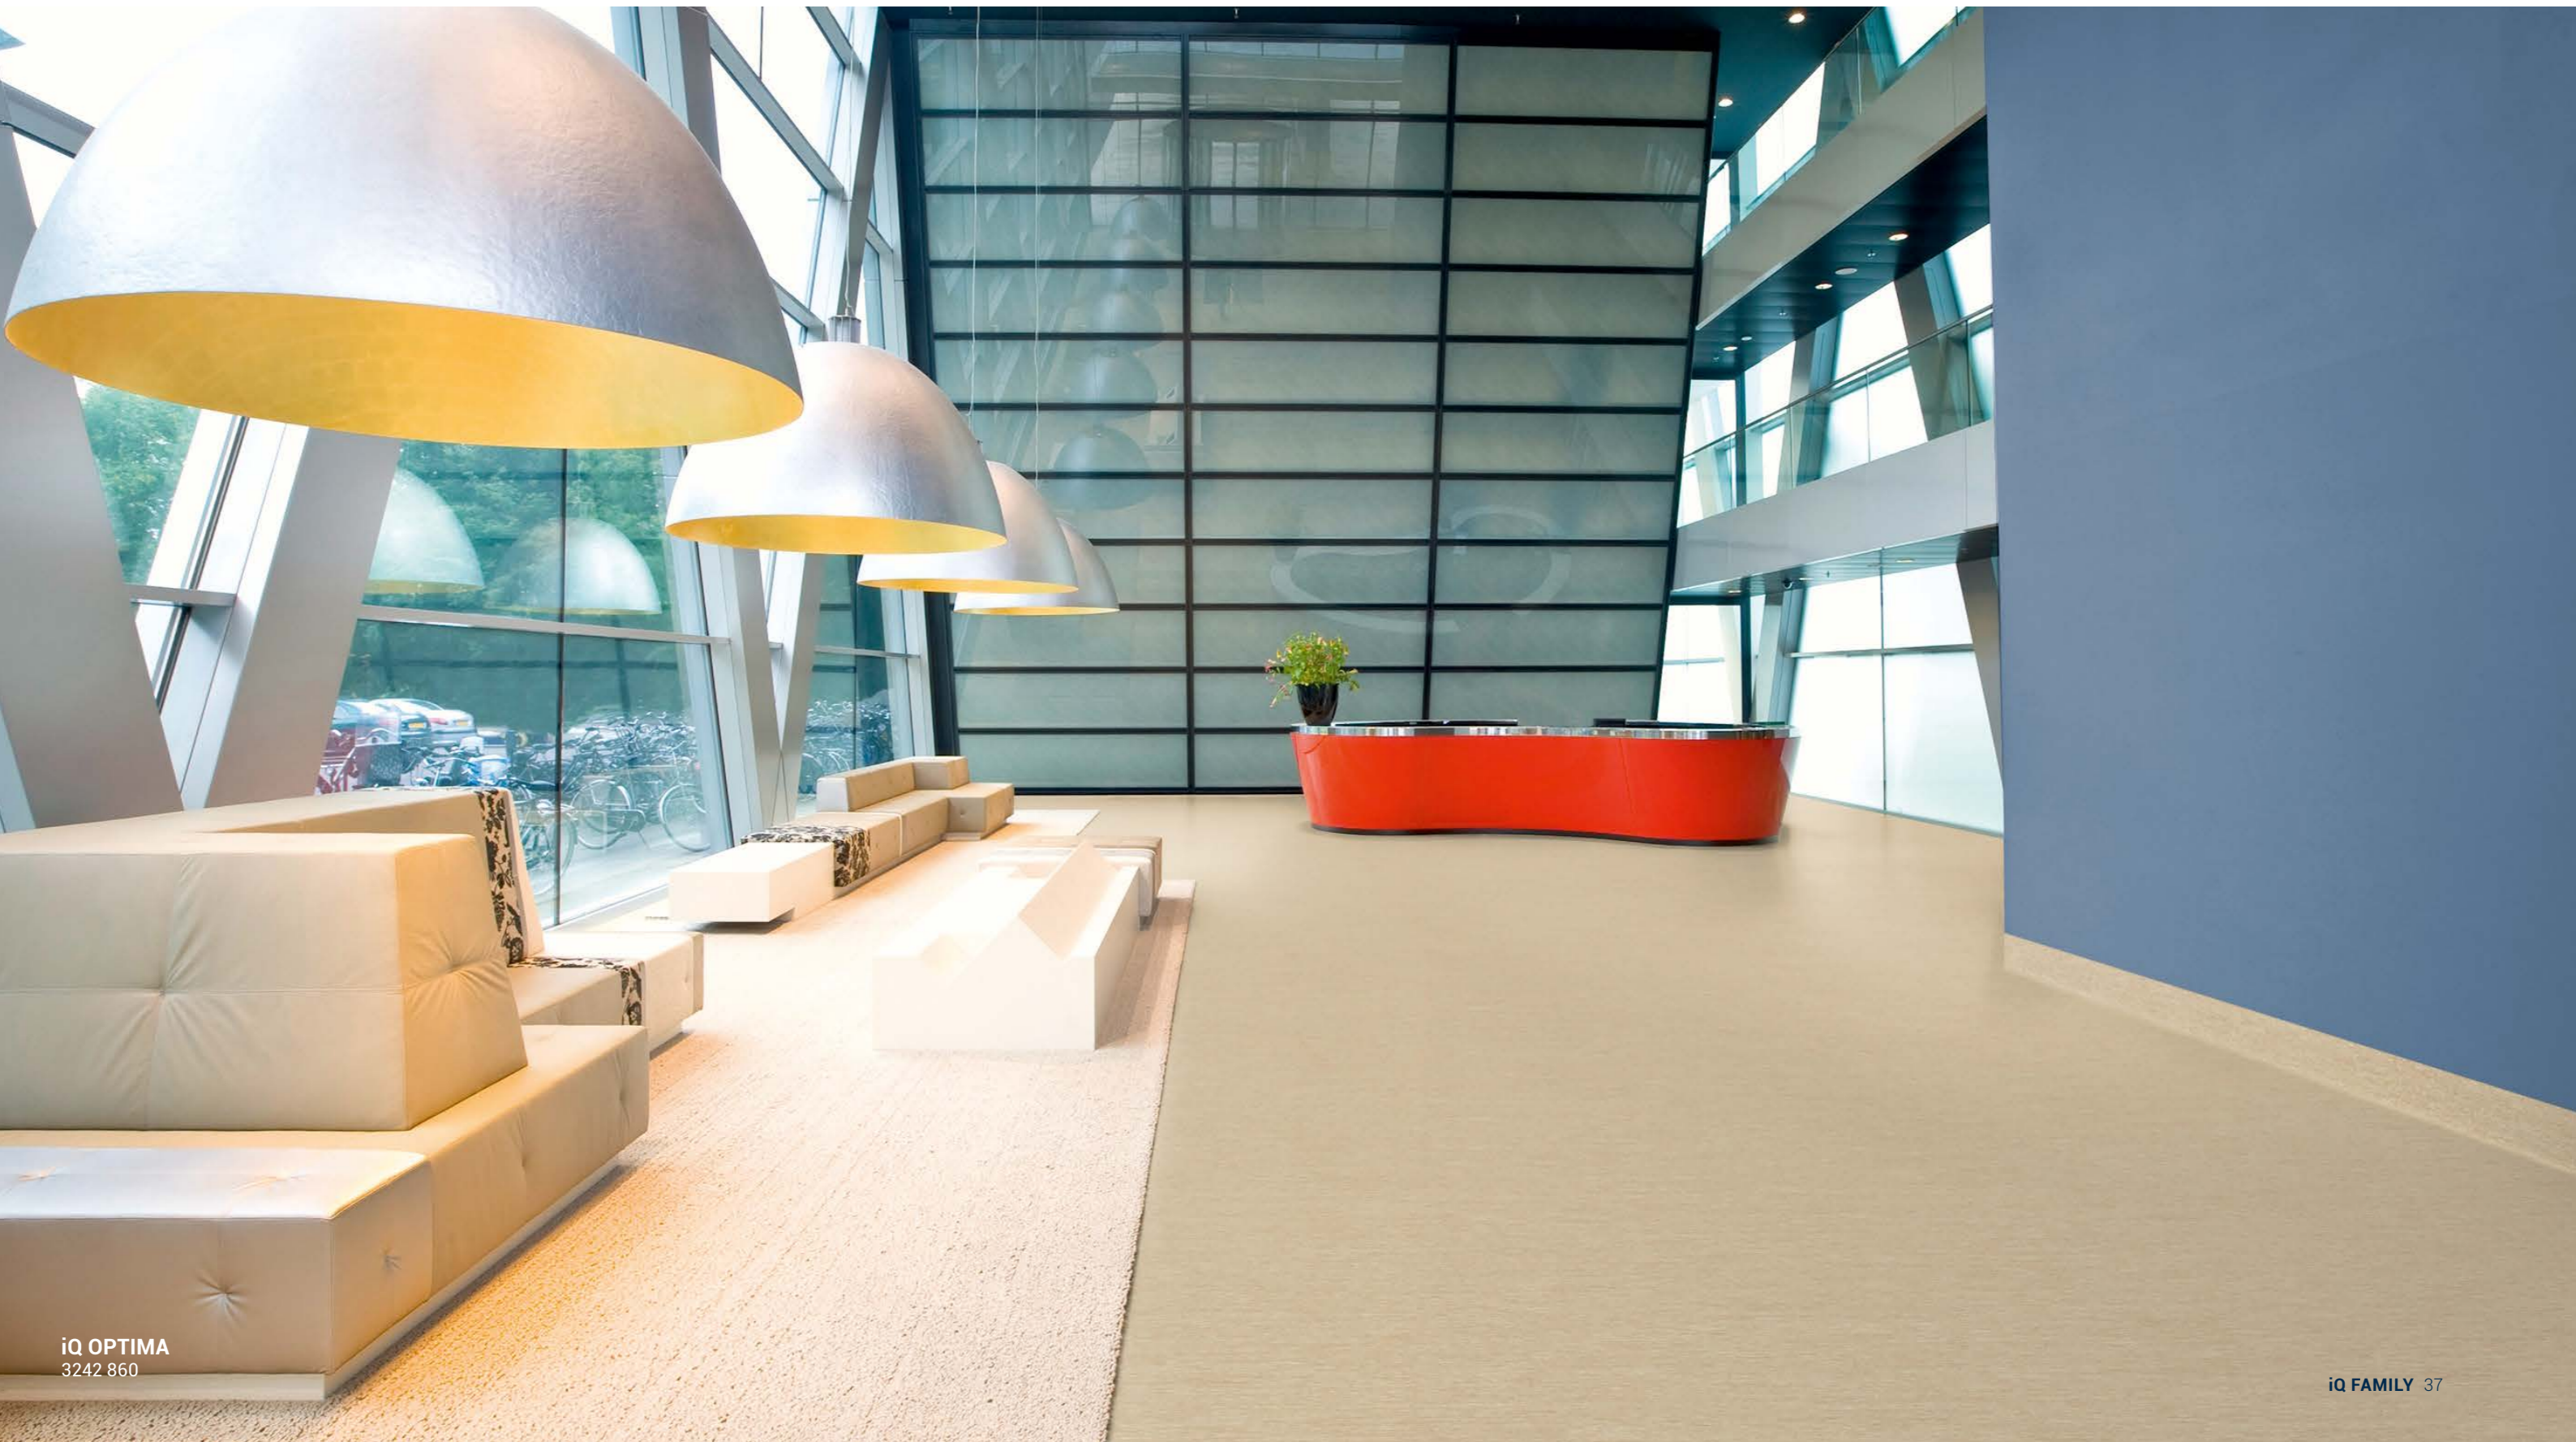


iQ OPTIMA NEUTRALS

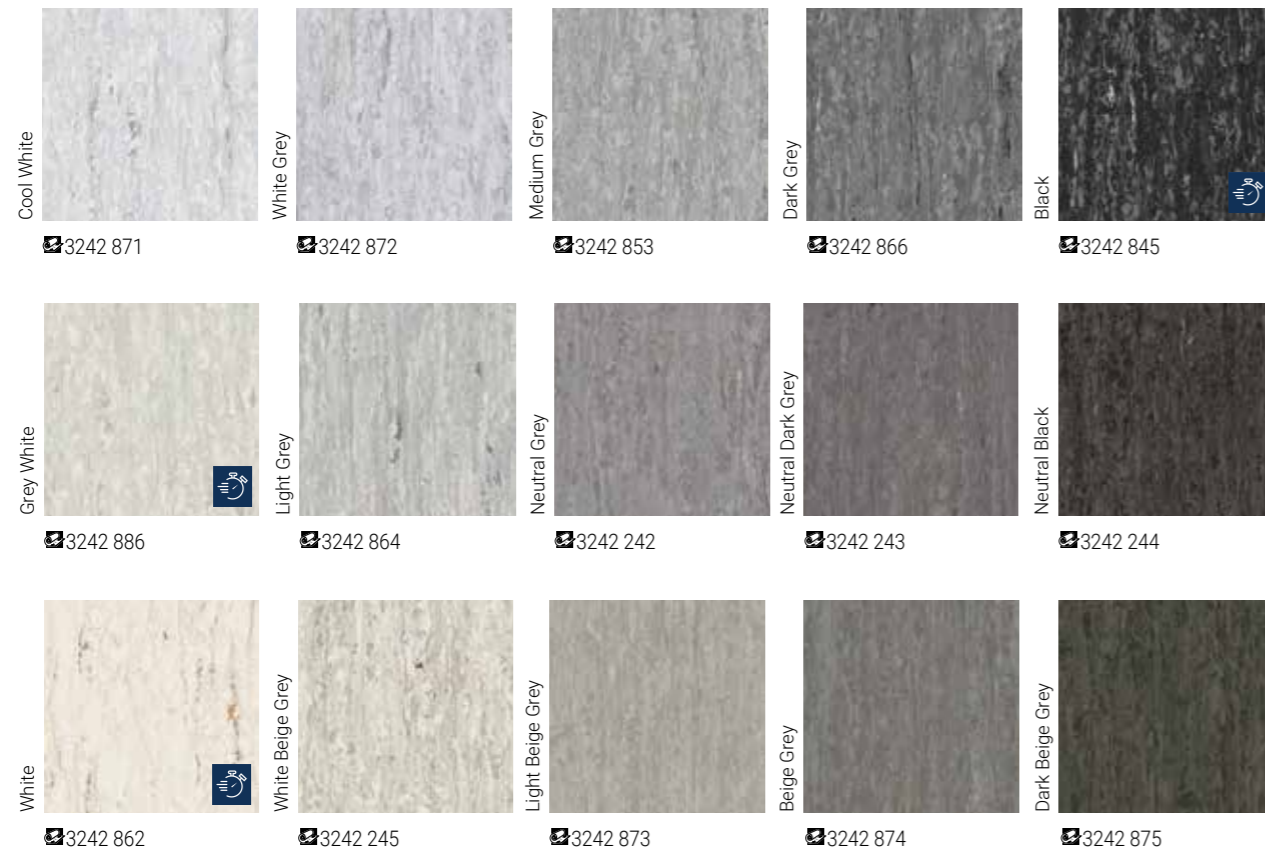

iQ OPTIMA ESSENCE



 Locally stocked

iQ OPTIMA MONO



iQ OPTIMA COLOURS



iQ TORO SC



iQ TORO SC
3093 100



iQ GRANIT SD



iQ GRANIT SD
3096 711


iQ TORO SC


Permanently static-conductive flooring for use in operating theatres, x-ray and clean rooms, laboratories and elsewhere. The advanced conductive properties come from embedded carbon-black particles running straight through the product and a pure-carbon backing.

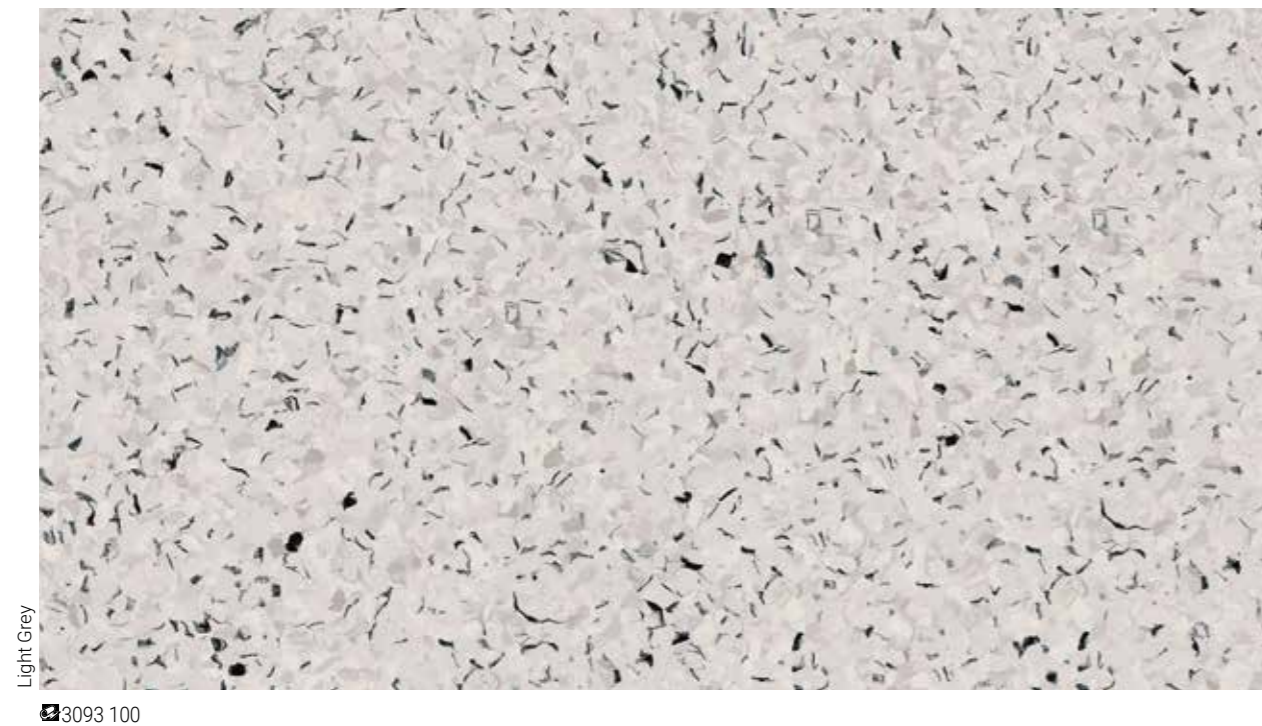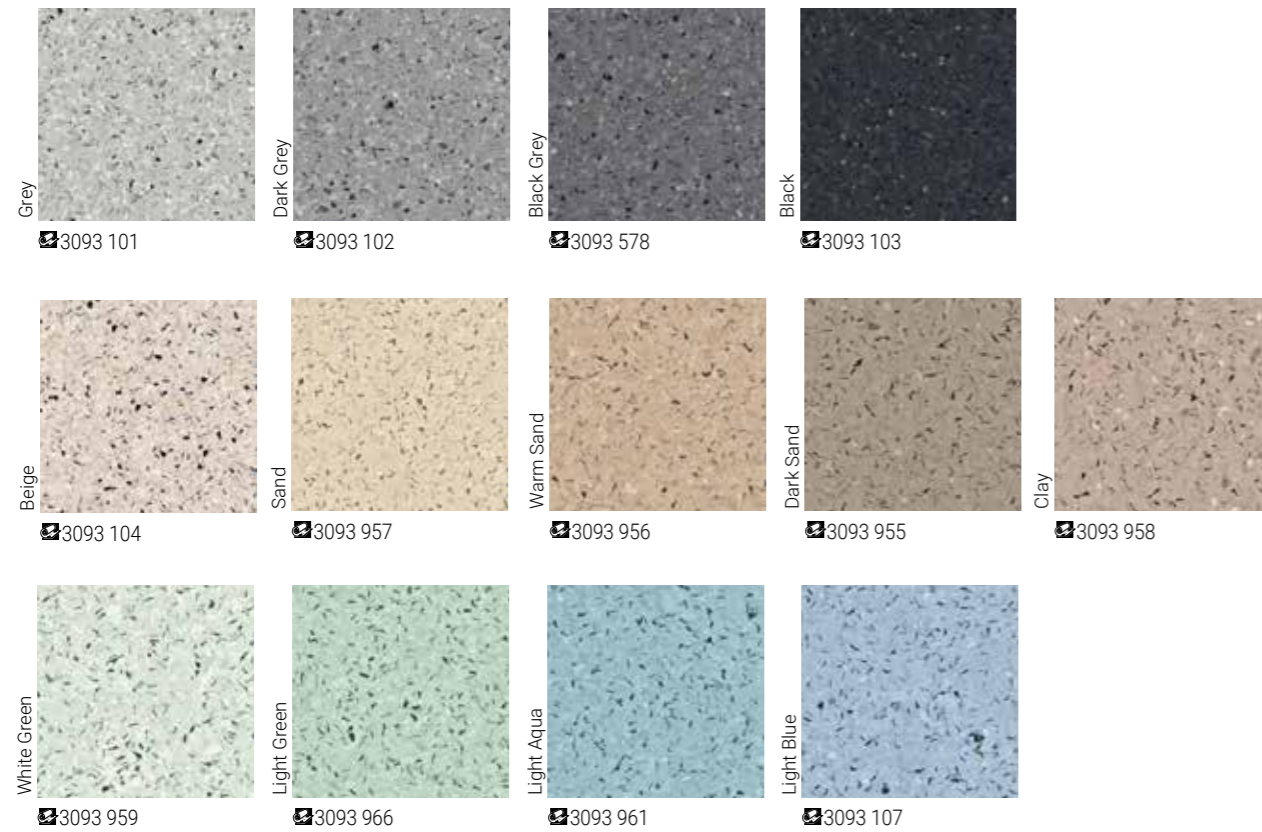

iQ GRANIT SD

Permanently static-dissipative homogeneous flooring for use in laboratories, clean rooms and ESD-sensitive areas in hospitals. iQ Granit SD is a DIF-classified dissipative floor.

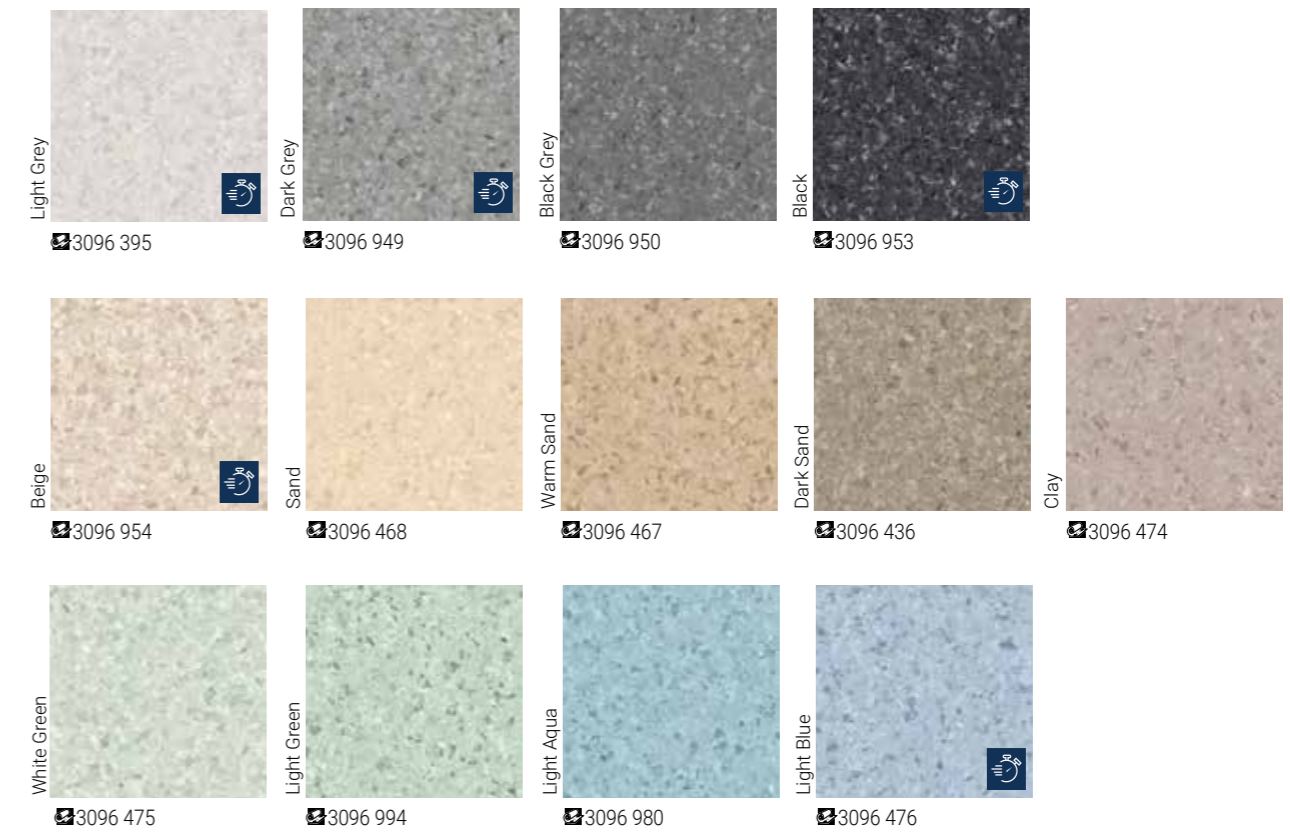

 Locally stocked

iQ REFERENCES

YPERMAN HOSPITAL

Ieper, Belgium, 2015 - Architect: Boeckx - 60,000 m²



CARE HOTEL SWINHOVE

Zwijndrecht, The Netherlands, 2011 - Architect: Topos Architecten - 1 500 m²



ARGELES INSTITUTE

Argelès, France, 2010 - Architect: Sera Architectes - 3 500 m²





iQ GRANIT

SAINT NAZAIRE HEALTH COMPLEX

Saint-Nazaire, France, 2012 - Architect: Group-6 for SAS La Cité Sanitaire - 66 000 m²



iQ GRANIT



iQ GRANIT

MELANCHTHON

Rotterdam, The Netherlands, 2013 - Architect: RoosRos Architecten - 2 000 m²



MEDICANA HOSPITAL BEYLIKDUZU


Istanbul, Turkey, 2010 - Architect: Geyran Architects - 11 000 m²



COORDINATED ACCESSORIES

WELDING RODS

- 4mm multi- and single-colour welding rods available.
- Heat welding ensures the surface is fully waterproof and hygienic.
- Superior seam strength.
- Easy cleaning and maintenance.

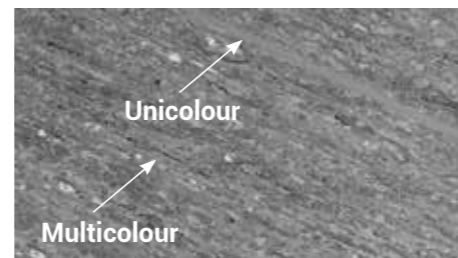

COVINGS

- Superior flexibility.
- Easy to cove up walls.
- Wet room approved, fully waterproof.



WALL COVERINGS

Wallgard (controlled environments)

- Sealed and smooth surface for optimal hygiene.
- Hygienic and watertight.
- High flexibility, easy to cove and weld with flooring.



Aquarelle Wall HFS (wet room areas)

- Waterproof installation.
- Fresh, on-trend colours and contemporary designs.
- Unique Wet room Concept by Tarkett: matching floors, walls, borders and accessories.
- Hygienic and easy to maintain.



FLOORCRAFT SERVICE


- A fully customised solution to match your choice of design and colour, for a more individualised flooring environment.
- A bank of design options in any size in a selection of 20 colour options.
- Floorcraft designs are assembled in the factory and sent on-site.



A COMPLETE COORDINATED RANGE

GRANIT ACOUSTIC


24 colours
Increases underfoot comfort (approx. +15dB and greatly reduces sound transmission)



3221 383

IQ TORO SC


14 colours
high-quality static control flooring
Electrical resistance of $5 \times 10^4 - 10^6$ Ohms



3093 102

GRANIT MULTISAFE


16 colours
The ideal choice for wet areas, designed for better safety underfoot
Studded surface designed for better safety underfoot (slip resistance Class C)



3476 383

IQ GRANIT SD


14 colours
High quality dissipative flooring
Electrical resistance of $10^6 - 10^8$ Ohms

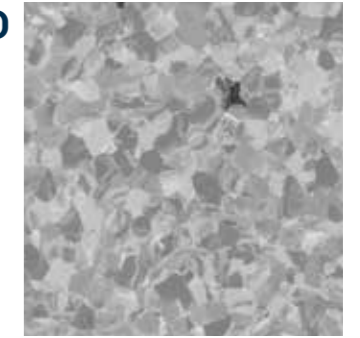

3096 712

GRANIT SAFE T.

16 colours
The hardwearing homogeneous flooring with anti-slip properties
Provides a slip rating of R10

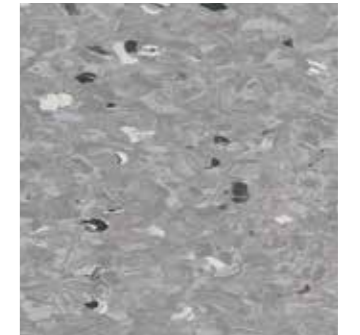

3952 698

iQ Surface Floor

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Homogeneous vinyl floor covering
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2800 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0009-DoP-2013-07
Reaction to fire	AS/ISO 9239.1	10.3kW/m ² Smoke 71%.min
	AS/NZS 3837	Group 3 - Average specific extinction areas less than 250g/m ² /kg
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	0,010 m ² *K/W
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	DIN 51130	R10
	AS 4586	P4
Curl resultant to heat	EN ISO 23999	≤ B mm for rolls
Clean room	ISO 14644-1	ISO class 4
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average Measured Value : ≤ 0.40 % for rolls
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Wetroom approval	EN 13553 Annex A	Watertight
Seam Strength Average Value	EN 684	≥ 400 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,24 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		3,83 kg CO ₂ e /m ² /year
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission		E1
GreenTag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll		Roll 2 x 23 m
Number of designs available		20



The above information is subject to modification for the benefit of further improvement (11/1/2023). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

Surface Wall

Datasheet

Classification	Norm	Tarkett Value
Product type	EN 259-1	Heavy Duty Wall Covering
Technical Characteristics	Norm	Tarkett Value
Total thickness	EN ISO 24346	2 mm
Total weight	EN ISO 23997	3400 g/m ²
Wear layer thickness	EN ISO 24340	2 mm
Surface treatment		PU SHIELD
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 15102	0019-0065-DoP-2019-07
Reaction to fire	AS/NZ 3837	Group 1
	Average specific extinction area	75.8m ² /kg
Technical Performance	Norm	Tarkett Value
Colour fastness to light	ISO 105-B02	≥ 7
Chemical resistance	ISO 26987	Excellent Resistance
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission class		E1
GreenTag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll		Roll 2 x 23 m
Number of designs available		7



The above information is subject to modification for the benefit of further improvement (05/09/2023). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com.au>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

iQ ONE

TECHNICAL DATA

CERTIFICATION & CLASSIFICATION	STANDARDS	iQ One
Type of floor covering	EN 14565	Homogeneous floor covering based upon synthetic thermoplastic polymers
CE certification	EN 14041	Yes
ISO certification		Ronneby ISO 9001/Ronneby ISO 14001
TECHNICAL CHARACTERISTICS	STANDARDS	iQ One
iQ surface treatment		Yes
Total thickness	ISO 24346 – EN 428	2.0 mm
Wear layer thickness	ISO 24340 – EN 429	2.0 mm
Total weight	ISO 23997 – EN 430	2800 g/m ²
Form of delivery	ISO 24341 – EN 426 (rolls)	Approx. 23 running metres x 200 cm Art. no. 21200_... 3 digit colour colour number
TECHNICAL PERFORMANCES	STANDARDS	iQ One
Dimensional stability	EN 14565 Annex C AS/ISO 9239.1	≤ 0.20 % Critical radiant flux 10.5kW/m ²
Reaction to fire	AS/NZ 3837 (wall)	Smoke 33%.min Group 3
Residual indentation	ISO 24343-1 – EN 433	Required value: ≤ 0.10 mm Best measured value: 0.02 mm
Castor chair test	ISO 4918 – EN 425	Suitable
Static electrical discharge	EN 1815	< 2 kV
Total VOC emissions	ISO 16000-6	≤ 100 µg/m ³ (after 28 days)
Underfloor heating		Suitable – max 27°C
Light fastness	EN ISO 105-B02	≥ level 6
Chemical resistance	ISO 26987 – EN 423	Excellent
Slip resistance	DIN 51130 AS 4586	R9 P4
Wet room approval	EN 13553 Annex A GBR approval system	Watertight Certified
Flexibility	ISO 24344 – EN 435	Pass
Colours		10
SUSTAINABILITY PERFORMANCE	STANDARDS	iQ One
GreenTag		Level A
HealthRate		Platinum

The above information is subject to modification for the benefit of further improvement. (11/22).

CUSTOMS TARIFF: 48205000000F

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

iQ Natural

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Homogeneous vinyl floor covering with renewable plasticizer
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2800 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0007-DoP-2013-07
Reaction to fire	ISO AS 9239-1	Critical Radiant Flux 11.2kW/m ² Smoke 45%.min
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² •K/W
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	AS 4586 / DIN 51130*	R10 / P49
Curly resultant to heat	EN ISO 23999	≤ 8 mm for rolls ≤ 2 mm for tiles
Clean room	ISO 14644-1	ISO class 3
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average measured value : ≤ 0.25 % for tiles Average Measured Value : ≤ 0.40 % for rolls
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Wetroom approval	EN 13553 Annex A	Watertight
Seam Strength Individual Value	EN 684	≥ 400 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		2,24 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		3,09 kg CO ₂ eq /m ²
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission class		E1
GreenTag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll		Roll 2 x 23 m
Number of designs available		35



The above information is subject to modification for the benefit of further improvement (05/09/2023). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.



iQ Megalit

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Homogeneous vinyl floor covering
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2500 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0001-DoP- 2013-07
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 9.0kW/m ² Smoke 288%.min
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² ·K/W
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm
Slip resistance	DIN 51130 AS 4586	R10 P4
Curl resultant to heat	EN ISO 23999	≤ 8 mm for rolls
Clean room	ISO 14644-1	ISO class 3
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average Measured Value : ≤ 0.40 % for rolls
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Wetroom approval	EN 13553 Annex A	Watertight
Seam Strength Average Value	EN 684	≥ 400 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,24 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		3,83 kg CO ₂ e /m ² /year
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission		E1
GreenTag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll		Roll 2 x 23 m
Number of designs available		10



The above information is subject to modification for the benefit of further improvement (11/1/2023). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

iQ Eminent

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Homogeneous Vinyl floor covering
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Surface Restoration		Yes
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2750 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0008-DoP-2013-07
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 11.0kW/m ² Smoke 117%.min Group 3 238.8m ² /kg
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² ·K/W
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	DIN 51130 AS 4586	R10 P4
Curl resultant to heat	EN ISO 23999	≤ 8 mm for rolls
Clean room	ISO 14644-1	ISO class 4
Riboflavin Test	Fraunhofer method	Class 0 : Excellent
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average measured value : ≤ 0.40 % for rolls
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Wetroom approval	EN 13553 Annex A	Watertight
Seam Strength Average Value	EN 684	≥ 400 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,24 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		3,83 kg CO ₂ e /m ² /year
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
GreenTag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll		Roll 2 x 23 m
Number of designs available		26



The above information is subject to modification for the benefit of further improvement (27/1/2023). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

iQ Granit

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Homogeneous Vinyl floor covering
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Surface Restoration		Yes
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2750 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0009-DoP-2013-07
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 9.8kW/m ² Smoke 99%.min
	AS/NZS 3837 Average specific extinction area	Group 3 280.4m ² /kg
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² -K/W
Technical Performance	Norm	Tarkett Value
Marine Equipment	IMO 2010 FTP Code part 2 and 5	Approved
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	DIN 51130 AS 4586	R10 P4
Curl resultant to heat	EN ISO 23999	≤ 8 mm for rolls
Clean room	ISO 14644-1	ISO class 4
Riboflavin Test	Fraunhofer method	Class 0 : Excellent
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Measured Value : ≤ 0.40 % for rolls
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Wetroom approval	EN 13553 Annex A	Watertight
Seam Strength Average Value	EN 684	≥ 400 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,24 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		3,83 kg CO ₂ e /m ² /year
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission		E1
GreenTag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll		Roll 2 x 25 m
Number of designs available		50



The above information is subject to modification for the benefit of further improvement (27/1/2023). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

iQ Optima

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Homogeneous vinyl floor covering
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2700 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0003-DoP-2013-07
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 10.4kW/m ² Smoke 143%.min
	AS/NZ 3837 (wall) Average specific extinction area	Group 3 268.6m ² /kg
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² -K/W
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	AS 4586 DIN 51130	P4 R10
Curl resultant to heat	EN ISO 23999	≤ 8 mm for rolls
Clean room	ISO 14644-1	ISO class 4
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average Measured Value : ≤ 0.40 % for rolls
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (maximum 27°C)
Wetroom approval	EN 13553 Annex A	Watertight
Seam Strength Average Value	EN 684	≥ 400 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Carbon Footprint (Cradle-to-Gate, EPD Modules A1-A3)		5,24 kg CO ₂ eq /m ²
Total Carbon Footprint (EPD Modules A-D, incl. recycling scenario)		3,83 kg CO ₂ e /m ² /year
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission		E1
GreenTag		Level A
Health Rate		Platinum
Dimensions and designs		
Roll		Roll 2 x 25 m
Number of designs available		64



The above information is subject to modification for the benefit of further improvement (27/1/2022). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

iQ Toro SC

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Permanently static conductive pressed homogeneous vinyl flooring
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Surface Restoration		Yes
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2800 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0038-DoP-2013-07
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 11.0kW/m ² Smoke 55%.min
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² ·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0,30)
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	DIN 51130 AS 4586	R9 P4
Electrical Insulation	VDE0100, Part 600	Ri ≤ 5x10 ⁴ Ohms
Electrical resistance	ESD-approval SP method 2472	R ≤ 10 ⁹ Ohms
Electrical resistance	EN 1081	R1 5x10 ⁴ ≤ R ≤ 10 ⁶ Ohms / R2 5x10 ⁴ ≤ R ≤ 10 ⁶ Ohms
Electrical Resistance	EN/IEC 61340-4-1, 100 V	R 5x10 ⁴ ≤ R ≤ 10 ⁶ Ohms*
Electrical Resistance	EN/IEC 61340-4-5	≤ 3,5x10 ⁷ Ohms
Curl resultant to heat	EN ISO 23999	≤ 8 mm for rolls
Clean room	ISO 14644-1	ISO class 4
Castor chair	ISO 4918	Suitable
Furniture leg	ISO 16581	No damage
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average Measured Value : ≤ 0.40 %
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Seam Strength Average Value	EN 684	≥ 240 N/50mm
Seam Strength Individual Value	EN 684	≥ 180 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission		E1
Green Tag		Level A
HealthRATE		Platinum

Dimensions and designs	
Roll	Roll 2 x 23 m
Number of designs available	14

* Measured to ground



The above information is subject to modification for the benefit of further improvement (19/12/2022). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

iQ Granit SD

Datasheet

Classification	Norm	Tarkett Value
Product type	ISO 10581	Permanently static dissipative pressed homogeneous vinyl flooring
Binder content	ISO 10581	Type I
Commercial classification	ISO 10874	34 Very Heavy
Industrial classification	ISO 10874	43 Heavy
Technical Characteristics	Norm	Tarkett Value
Surface treatment		New iQ PUR
Surface Restoration		Yes
Total thickness	ISO 24346	2 mm
Wear layer thickness	ISO 24340	2 mm
Total weight	ISO 23997	2800 g/m ²
Performance for CE Marking	Norm	Tarkett Value
Declaration of Performance #	EN 14041	0019-0033-DoP-2013-07
Reaction to fire	AS/ISO 9239.1	Critical radiant flux 9.4kW/m ² Smoke 90%.min
Static Electrical Propensity	EN 1815	Antistatic (≤ 2 kV)
Thermal resistance	EN 12667	~0,010 m ² ·K/W
Slip resistance	EN 13893	Class DS (μ ≥ 0,30)
Technical Performance	Norm	Tarkett Value
Residual indentation	EN ISO 24343-1	Required value: ≤ 0,10 mm Best measured value: 0,02 mm
Slip resistance	DIN 51130 AS 4586	R10 P4
Electrical Insulation	VDE0100, Part 600	Ri ≥ 5x10 ⁴ Ohms
Electrical resistance	ESD-approval SP method 2472	R ≤ 10 ⁹ Ohms
Electrical resistance	EN 1081	R1 ≤10 ⁸ Ohms / R2 ≤10 ⁸ Ohms
Electrical Resistance	EN/IEC 61340-4-1, 100 V	R ≤ 10 ⁸ Ohms*
Curl resultant to heat	EN ISO 23999	≤ 8 mm for rolls
Clean room	ISO 14644-1	ISO class 4
Castor chair	ISO 4918	Suitable
Colour fastness to light	ISO 105-B02	≥ 7
Dimensional stability	EN ISO 23999	Average Measured Value : ≤ 0.40 %
Ease of Decontamination	ISO 8690 – DIN 25415	Excellent
Chemical resistance	ISO 26987	Excellent Resistance
Bacteria Resistance	ISO 846 Part C	Does not promote growth
Underfloor heating		Suitable (subfloor temperature maximum 27°C)
Seam Strength Average Value	EN 684	≥ 240 N/50mm
Seam Strength Individual Value	EN 684	≥ 180 N/50mm
Sustainability performances	Norm	Tarkett Value
Recyclability through ReStart®		Recyclable
Recycled content		25,5 %
Total VOC Emissions	EN 16516	Platinum (≤ 10 µg/m ³)
Formaldehyde emission		E1
Green Tag		Level A
HealthRATE		Platinum
Dimensions and designs		
Roll	Roll 2 x 23 m	
Number of designs available	14	

* Measured to ground



The above information is subject to modification for the benefit of further improvement (19/12/2022). According to the European Regulation N°305/2011 for CE Marking, the Declarations of Performance are available on our website <https://www.tarkett.com>. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for the instructions.

The designs and photos used in this brochure are for illustration purposes only.
They are not contractual images and do not stand for product recommendation.
Design: Agence Gecko

www.tarkett.com.au

